



SCMS SCHOOL OF ENGINEERING AND TECHNOLOGY, KARUKUTTY

Grants received from Government and non-governmental agencies for research projects / endowments in the institution during 2022-2023

SLNO:	FACULTY NAME	Department	Sanctioned by	Sanctioned for	Sanctioned amount	Current Status
1	Ms. Meera Varghese	Civil Engineering	CERD_KTU	Research work	46000	Ongoing
2	Ms. Merin Mathew	Civil Engineering	CERD_KTU	Research work	160000	Ongoing
3	Dr. Praseeja A V	Civil Engineering	CERD_KTU	Research work	155000	Ongoing
4	Dr. Rahul R Pai	Civil Engineering	CERD_KTU	Research work	90000	Ongoing
5	Vinoj PG	ECE	CERD_KTU	Research work	25000	completed
6	Mary Catherine	ECE	CERD_KTU	Research work	60000	Ongoing
7	Dr. Jayadevan P.C	AU	CERD_KTU	Research work	50000	Ongoing
8	Dr. Albin Joseph	AU	CERD_KTU	Research work	84000	Ongoing
9	Asha S	CSE	CERD_KTU	Research work	159000	Ongoing
10	Susmi Jacob	CSE	CERD_KTU	Research work	26500	Ongoing
11	Dr Gibin George	ME	CERD_KTU	Research work	70000	Ongoing
12	Dr Gibin George	ME	CERD_KTU	Research work	17500	Ongoing
13	Dr. Geethu R	BSH	CERD_KTU	Research work	75000	Ongoing
TOTAL SANCTIONED AMOUNT SANCTIONED FOR RESEARCH WORK BY GOVERNMENT AND NON-GOVERNMENT AGENCIES 2022-2023					10,18,000	



PRINCIPAL
SCMS SCHOOL OF ENGINEERING & TECHNOLOGY
VIDYANAGAR, PALLISSERY, KARUKUTTY
ERNAKULAM, KERALA-683 576



APJ ABDUL KALAM TECHNOLOGICAL UNIVERSITY

CET campus, Thiruvananthapuram - 695 016

Ph: 0471 2598122; Fax: 2598522 www.ktu.edu.in Email: university@ktu.edu.in

No. **KTU/RESEARCH 3/1082/2022**

Dated: **26.02.2023**

From

The DEAN (Research)

To

The Principal,

SCMS College of Engineering and Technology, Ernakulam.

Sir,

Sub:- **APJAKTU - CERD - Research Seed Money Scheme - Projects Selected for funding - reg:-**

I am glad to inform you that the project proposals as listed in Annexure I are provisionally selected for funding under Research Seed Money (RSM) scheme of KTU.

The expenditure should be incurred as per the sanctioned budget heads and in accordance with terms and conditions given in Annexure II. Format of MOU to be furnished by the college is given as Annexure III.

The Principal Investigators may please be directed to forward request (in Annexure II) for releasing the fund with Bank Account details. The fund will be released only after settling pending accounts of the principal investigator in CERD, if any. Any request received after three months from the date of this letter will not be considered.

Yours faithfully

Dr. Shalij P.R *

DEAN (Research)

Copy To

1. **Shri. Jayadevan P C, Assistant Professor in Mechanical Engineering.**
2. **Dr. Gibin George, Assistant Professor in Mechanical Engineering**
3. **Dr. Abin Joseph, Assistant Professor in Mechanical Engineering.**
4. **Smt. Meera Varghese, Assistant Professor in Civil Engineering.**
5. **Smt. Merin Mathew, Assistant Professor in Civil Engineering.**
6. **Dr. Praseeja A. V., Assistant Professor in Civil Engineering.**
7. **Shri. Rahul R Rai, Assistant Professor in Civil Engineering.**
8. **Smt. Asha S, Assistant Professor in computer Science and Engineering.**
9. **Dr. Geethu R, Assistant Professor in Science.**



10. Smt. Mary Catherine V. G, Assistant Professor in Electronics and Communication Engineering.

* This is a computer system (Digital File) generated letter. Hence there is no need for a physical signature.



SCMS School of Engineering and Technology, Ernakulam

SL No	Name of Principal Investigator	Title of the project	Branch	Amount Sanctioned	1st installment	2nd installment	Consumables	Equipment	Travel	Contingency		
1	Jayadevan P C Assistant professor	Analysis of Low Reynolds Flow (Stokes Flow) Through Micro Capillaries	ME	50,000	40,000	10,000	40,000	0	5000	5000		
2	Dr. Gibin George Assistant Professor	Development of eco-friendly packaging materials from agricultural wastes.	ME	70,000	60,000	10,000	10,000	50,000	5000	5000		
3	Dr. Albin Joseph Assistant Professor	Development of Floating type solar still desalination system integrated with direct absorption flat plate solar collector for improved productivity	ME	84,000	60,000	24,000	60,000	0	8000	16,000		
4	Meera Varghese Assistant Professor	Sea water intrusion modelling into some of the coastal aquifers in Thrissur district.	Civil Engineering	46,000	35,750	10,250					testing charges 25,000	
5	Merin Mathew Assistant Professor	Catchment scale source apportionment of sediment yield into Vembanad Lake	Civil Engineering	160,000	110,000	50,000					Testing charges 80,000	
6	Dr. Praseeja A V Assistant Professor	Study of dispersion coefficient of contaminants through different types of soils and remediation using natural fibres	Civil Engineering	155,000	127,500	27,500						
7	Rahul R. Pai Assistant Professor	Fatigue studies and resilient behavior of crushed brick fly ash lime (CBFL) mix for use in base layer of flexible pavement	Civil Engineering	90,000	57,500	32,500					Testing charges 32,000	Experimental charges 18,000
8	Asha S Assistant Professor	Multimodal Ensemble Deep fake Detection using Visual-Audio-Textual features	CSE									
				159,000	130,000	29,000	5,000	130,000	12,000	12,000		



9	Dr. Geethu R. Assistant Professor	Developing cost effective and eco-friendly copper tin sulphide material for photovoltaic application	Science	75,000	50,000	25,000	40,000	5,000	10,000	20,000
10	Mary Catherine V G Assistant Professor	Touch Activated Soft Robotic Hand Control for Elderly Assistance	ECE	60,000	40,000	20,000	30,000	15,000	5,000	10,000



**APJ Abdul Kalam Technological University
Thiruvananthapuram**

Abstract

APJAKTU - Financial Assistance to Student Projects 2022-23 - Administrative Sanction accorded - Orders issued.

RESEARCH SECTION

U.O.No. 672/2023/KTU

Thiruvananthapuram, Dated: 18.03.2023

- Read:-*1. Minutes of the 1st meeting of Engineering Research Council dated 27.01.2010.
2. Minutes of 2nd meeting of Executive Committee dated 21.10.2010.
3. Meeting of the 2nd Research Council dated 29.02.2017.
4. Proposals of Student Projects for Financial Assistance.
5. Screening Committee meeting held on February 2023 for evaluation of project proposals.

ORDER

Vide paper read 1st above, the Engineering Research Council had approved the scheme for Financial Assistance to Student Projects for the Government Engineering Colleges. Vide paper read 2nd above, it was decided to extend the financial assistance to the student projects to the students of the Government aided and Government Controlled Engineering Colleges.

It was decided to extend the financial assistance to Student Projects for all engineering colleges affiliated to the University with NBA accreditation as per paper read 3rd above. It was also decided that the financial assistance will be provided as reimbursement of expenditure occurred for the sanctioned project.

The Screening Committee meetings held in February 2023 evaluated the project proposals forwarded from Engineering Colleges affiliated to the University and recommended financial assistance to selected proposals as per the List appended.

Administrative sanction is therefore accorded for financial assistance to student project for an amount of ₹46,58,352/- (Forty Six Lakhs Fifty Eight Thousand Three Hundred and Fifty Two only) as detailed in the list attached below. The project shall be completed within a period of 1 year and the project shall be completed with the students who presented the project before the Screening Committee.

The expenditure should be incurred as per the terms and conditions as per Annexure II attached. The amount will be reimbursed to the Principal of the concerned Colleges only after the successful completion of the project and on the production of certified bills & vouchers along with the audited utilization certificate, statement of expenditure and project completion report.

The expenditure shall be met from the Head of Account "CERD (Plan) 4181-6307-Innovative Student Project".

Orders are issued accordingly.

Sd/-

Dr. Shalij P.R *
DEAN (Research)

Copy to:-

1. Principals of Engineering Colleges.
2. Principal Investigators.



* This is a computer system (Digital File) generated letter. Hence there is no need for a physical signature.

SI No	Name of Principal Investigator	Name of Student Investigators	Branch	Title of the Project	Amount Sanctioned	Consumables	Equipments	Travel	Contingency	
131	Dr Gibin George Assistant Professor Co-Investigator Vishnu H Assistant Professor	Aman S Arun P Gopikrishna Premchand Richu Shaju	Mechanical	Biodegradable packing peanuts based on banana leaf ribs.	17,500	1,000	12,500	2,000	2,000	
132	Vinoj P G Assistant Professor Co-Investigator Dr Varun G Menon Professor	Anandu Suresh Sagar P Gokul Sayuj MJ Yunus A A	ECE	Forest fire fighting using FPV drone	25,000	10,000	5,000	5,000	5,000	
133	Susmi Jacob Assistant Professor Co-Investigator Dr Varun G Menon Professor	Mahesh S Mahesh V C Suhail Nassar	CSE	A deep learning model for smart phone authentication during voice interaction through in ear wearable sensors	26,500	2,000	16,500	4,000	4,000	

Sree Buddha College of Engineering Pattoor

SI No	Name of Principal Investigator	Name of Student Investigators	Branch	Title of the Project	Amount Sanctioned	Consumables	Equipments	Travel	Contingency	
134	Dr J B Sajin Associate Professor Co-Investigator Dr M S Senthil Saravanan Professor	Chikku Mathew Nithin Sabu Parameswaran Namboothiri K Pranav K	Mechanical	Design and feasibility studies on natural cellulose for baby diapers	20,000	10,000		5,000	5,000	

St. Joseph's College of Engineering & Technology, Palai

SI No	Name of Principal Investigator	Name of Student Investigators	Branch	Title of the Project	Amount Sanctioned	Consumables	Equipments	Travel	Contingency	
-------	--------------------------------	-------------------------------	--------	----------------------	-------------------	-------------	------------	--------	-------------	--



1. APJ ABDUL KALAM TECHNOLOGICAL UNIVERSITY

College of Engineering Trivandrum Campus,
Thiruvananthapuram. Pin 695 016

Application format for Research Seed Money

1. Title of the Research Proposal: **Analysis of Low Reynolds Flow (Stokes Flow) Through Micro Capillaries**

2. Name & address & experience of Investigator:

Dr. Jayadevan P C, Assistant Professor, Department of Automobile Engineering, SCMS School of Engineering and Technology, Karukutty-683576

jayadevanpc@scmsgroup.org

9946742436

3. Teaching experience: 8 Years

4. Objectives of Research (150 words)

The objectives of the research are,

- i) To investigate the characteristics of flow at low Reynolds numbers
- ii) Investigate the effect of surface irregularities on the flow characteristics
- iii) Develop in vitro devices based on the analysis

5. Broad Subject area / field of classification: Fluid Dynamics, Microchannel Flows

6. Project Type(s) (Basic Research / Applied Research / Developmental / Demonstration / Others: **Applied Research**)

7. Abstract (400 words)

Fluid flow through microchannels has very wide applications in engineering and bio-medical fields. Low Reynolds number flow serves the basis for many applications in biological systems, developing microelectromechanical devices, in porous media, etc. A clear understanding of the fluid dynamics of Stokes flow through microcapillaries are very essential for the design of MEMS and for the development of in-vitro devices. In macro scale, Stokes flow can be modeled by linearizing the Navier-Stokes equation. But the dimensions reduce to micro-scale, the flow deviates from the fundamental understandings. The studies reveal that the deviation may be due high aspect ratio of the microchannels or the effect of surface irregularities of the channel. The present study aims to explore the fluid flow characteristics of microcapillaries at low Reynolds numbers.

8. Scientific scope of the Research proposal (400 words)

The above problem has high research potential since the flow through cardiovascular systems can be modeled as Stokes flow in an in-vitro platform. The fluid flow in Lab-on-a-chip and Organ-on-a-chip is purely in low Reynolds number regime. The latest concept of the human-on-a chip can also be modeled by Stoke flow. The understanding of Stokes flow characteristics in microchannels can be applied in drug delivery and testing. Moreover, the diverse applications, Stokes flow through microcapillaries is a fundamental research problem in the area of micro and nanofluidics.

9. Applications / Socioeconomic importance / Relevance, if any, for the utilization and management of the natural resources of the State)

Understanding the dynamics of the flow can be applied to the design and fabrication of many in-vitro systems to mimic the in-vivo mechanisms. The analysis of body fluids for the detection of different ailments will become fast and economical if we use microscale systems. Also, the sample size for the testing will decrease drastically. All of these will lead to the advancement in point-of-care diagnostics and eventually to rural healthcare developments, which is a major concern in a developing country like India.

10. Scientific background of the project

- a) **Importance of the problem:** The problem of low Reynolds number flow through microchannels has importance in engineering as well as biomedical applications. Apart from the wide variety of applications, it has high fundamental/basic research value. An understanding of the characteristics of fluid flow is very important for the design of microfluidic devices, also for the development of new materials in the field of bio-microfluidics[1-7].
- b) **Related work already performed or in progress at your organization or in the state:** A successful research team working in the area of microfluids and nanofluidics at NIT Calicut under the guidance of Prof. Dr. C B Shoban.
I have done my research work both experimental and numerical, at Heat transfer Research laboratory of GEC Thrissur.
At SCMS presently no experimental works are going on in the related field. Computational analysis of fluid flow through microchannels are performing with the help of Ansys Fluent.
- c) **Related work already performed or in progress at other places in India or abroad:** In all primary institutions like IISc and IITs have well-equipped micro and nano research laboratories with numerical and experimental facilities.

11. Details of any preliminary work done by the investigator
- i) Jayadevan, P.C., Siddharth, R. and Kamath, P.M., 2019. Modeling Frictional Characteristics of Water Flowing Through Microchannel. *Journal of Applied Fluid Mechanics*, 12(1), pp.243-255.
 - ii) Siddharth, R., Jayadevan, P.C. and Kamath, P.M., 2017, March. Numerical study on effect of sinusoidal roughness pattern on fluid flow through microchannels. In *2017 International Conference on Innovations in Information, Embedded and Communication Systems (ICIIECS)* (pp. 1-4). IEEE.
 - iii) Jayadevan, P.C. and Kamath, P.M., 2021. Experimental investigation of liquid flow through microtubes of manufactured roughness level. *International Journal of Fluid Mechanics Research*, 48(4).

12. Detailed year-wise work plan (Indicate methods / Techniques to be used)

Activity (Months)	0-3	3-6	6-9	9-12	12-15	15-18	18-21	21-24
Review of Literature								
Computational Analysis								
Experimental analysis								
Analysis of data								
Report Writing								

13. Particulars of equipment required
- i) Computational Facility with Ansys Fluent and MATLAB
 - ii) Experimental facility
14. Particulars of any other facilities required
Nil
15. Particulars of the facilities that will be provided by the institution where this project will be implemented
The institution has a licensed version of Ansys Fluent
16. Whether the project was submitted to any other organization for financial support : No

17. Budget Details: Estimated expenditure: Rs. 75000

SI No	Items	Amount (Rs)
1	Consumables i) Fabrication of microchannel ii) Consumables like pneumatic tubes, connectors etc	Rs:30000 Rs: 10000
2	Equipment (For Private self-financing Colleges, 50% of the actual Equipment cost subject to the maximum of sanctioned amount shall be borne by the college)	Nil
3	Travel i) Travel to labs and fabrication facility	Rs: 15000
4	Contingency To buy journals, books, Accommodation etc	Rs: 20000
	Total	Rs:75000

18. The sources of funding the project including funds from other agencies from which financial assistance is obtained/expected to be obtained, and the quantum of assistance from each agency:
Nil

19. Quantum and nature of assistance expected from the APJAKTU:
Financial support

20. Name and address of the authority of Institution authorized to receive the grant:

SCMS School of Engineering and Technology
Vidya Nagar, Palissery, Karukutty,
Kerala 683576

21. Whether grant under this scheme had been availed earlier by the investigator: (If so, provide details): No


22. Details of projects already undertaken by the Principal Investigator with any other funding agency: Nil

References

1. Hakim, M., Kermanshah, L., Abouali, H., Hashemi, H.M., Yari, A., Khorasheh, F., Alemzadeh, I. and Vossoughi, M., 2022. Unraveling Cancer Metastatic Cascade Using Microfluidics-based Technologies. *Biophysical Reviews*, pp.1-27.
2. Grigorov, E., Peykov, S. and Kirov, B., 2022. Novel Microfluidics Device for Rapid Antibiotics Susceptibility Screening. *Applied Sciences*, 12(4), p.2198.
3. Mahmud, M.P., Bazaz, S.R., Dabiri, S., Mehrizi, A.A., Asadnia, M., Warkiani, M.E. and Wang, Z.L., 2022. Advances in MEMS and Microfluidics-Based Energy Harvesting Technologies. *Advanced Materials Technologies*, p.2101347.
4. Nie, J. and He, Y., 2022. Integration of three-dimensional printing and microfluidics. In *Multidisciplinary Microfluidic and Nanofluidic Lab-on-a-chip* (pp. 385-406). Elsevier.
5. Preetam, S., Nahak, B.K., Patra, S., Toncu, D.C., Park, S., Syväjärvi, M., Orive, G. and Tiwari, A., 2022. Emergence of microfluidics for next generation biomedical devices. *Biosensors and Bioelectronics: X*, p.100106.
6. Zheng, W., Xie, R., Liang, X. and Liang, Q., 2022. Fabrication of Biomaterials and Biostructures Based On Microfluidic Manipulation. *Small*, p.2105867.
7. Ageev, A.I. and Osipov, A.N., 2019. Stokes flow in a microchannel with superhydrophobic walls. *Fluid Dynamics*, 54(2), pp.205-217.

Declaration


Certified that the details furnished above are correct to the best of my knowledge and belief and that the amount of financial assistance, if granted, will be utilised for the purpose for which it is granted within the time prescribed by APJAKTU. I also undertake to abide by the rules and other conditions prescribed by the grantee.


Dr. Jayadevan P.C.
Name and Signature
of the Investigator

Place: Karukutty

Date: 27/7/2022




Name and Signature of
Head of the Institution

DR. PRAVEENSAL C.J.
PRINCIPAL
SCMS SCHOOL OF ENGINEERING & TECHNOLOGY

APJ ABDUL KALAM TECHNOLOGICAL UNIVERSITY

College of Engineering Trivandrum Campus, Thiruvananthapuram. Pin 695 016

Application format for Research Seed Money

1. Title of the Research Proposal: Development of Floating type solar still desalination system integrated with direct absorption flat plate solar collector for improved productivity.

2. Name & address & experience of Dr Albin Joseph

Investigator:

Assistant Professor

(Mobile No. and e-mail are mandatory)

Department of Automobile Engineering

SCMS School of Engineering and Technology,

Ernakulam

Mob: 7025934379

Email: albin@scmsgroup.org

3. Teaching experience: 6 Months

4. Objectives of Research (150 words)

- To synthesis carbon dot based nanofluid.
- To investigate the photo thermal conversion efficiency of the synthesized nanofluid.
- To optimize the synthesis process parameters of nanofluid.
- To prepare a spectrally selective floating type absorber
- To optimize the coating process parameter involved in the preparation of spectrally selective absorber.
- To design and fabricate the solar still and direct absorption flat plate solar collector.
- To investigate the performance of floating type absorber based solar still integrated with the direct absorption flat plate solar collector

5. Broad Subject area / field of classification: Desalination

6. Project Type(s) (Basic Research / Applied Research / Developmental / Demonstration /Others: Applied Research

7. Abstract (400 words)

In the present scenario, in many countries scarcity of water is a major issue. Desalination of sea water stands as a potential solution to meet the demand of water. However, desalination by employing fossil fuels as the energy source is expensive as well as polluting. Utilization of renewable energy is one of the possible solutions for the same. Among the various sources of renewable energy, solar energy is one of the clean and potential resources recommended by the experts due to its free availability. Desalination can be achieved by various devices like multi-stage flash distillation, Reverse Osmosis, Solar Stills, etc. Solar stills are compact low-cost devices that are suitable for small communities with minimal operational cost. In a conventional solar desalination system, the Still is placed under the solar irradiance and the evaporated water is condensed and collected. It is noticed from the literature that temperature of the water in the Still has very high influence in the performance of the stills. Productivity was found to be enhanced with the temperature of saline water, which could be feasible with an external heating. Hence the present proposal aims to develop a floating type solar still coupled with a direct absorption flat plate solar collector. In the flat plate collector, a solar selective C-Dot nanofluid is proposed as the working fluid. The C-Dot nanofluid absorbs the heat through the flat plate collector and transfer the heat to the solar still thus enhances the temperature of the saline which further results improved productivity. In addition, direct solar absorption system has additional advantage compared to conventional collectors that works on surface absorption as it neglects the chance of conduction and convectional losses.

8. Scientific scope of the Research proposal (400 words)

As it is well known that the fresh water is a matter of existence in earth due to which the production of fresh water has of great importance in the society. Even though the conventional desalination systems meet the present demands, the economic and ecological aspects of these system were drawn back. The conventional solar still vaporize the water from the saline by extracting the heat from the solar radiation. However, it is advisable to achieve an enhanced temperature at the surface of the saline water that improves the productivity, which was accomplished by the introduction of floating absorber. Moreover, further enhancement could be expected with addition heating of the saline water. By considering all these facts the proposal aims to improve the productivity of the existing solar stills by introducing floating absorber and a flat plate collector for external heating. The working fluid used in flat plate collector is a solar selective nanofluid that could a solar absorptivity in the range of 90 to 95%. Moreover, since the proposed system run the potential of solar radiation, the associated carbon emission and promote the sustainability.

9. Applications / Socioeconomic importance / Relevance, if any, for the utilization and management of the natural resources of the State)

Kerala state experience the scarcity of water during the month of February to may, which is period at which the ambient temperature is very high. (Maximum recorded value is 41.3 in Palakkad). Cities are mainly affected by these issues where it is difficult to get underground water due to the concern with soil pollution and population. Moreover, the large consumption of deep water by various factories especially of soft drink units, demands for fresh water to the citizens. Hence it is very important find some other means which is more convenient. Due to these reasons solar desalination dominates more to achieve the fresh water for the society. Moreover, the proposed project could find its application in mass production of fresh water by various governmental authorities if implemented at commercial scale.

10. Scientific background of the project

a) Importance of the problem.

As per the survey done by the National Renewable Energy Laboratory [1], the solar radiation falling on Indian region is around 7.5 kWh/m², which could be converted into useful forms. Taking into consideration the climatic aspects in a country like India, it could be strongly stated that solar energy production has great potential. Moreover, the production of fresh water is one of the essential needs in the present scenario in a state like Kerala. Many of people depends on deep water for their need during the peak summer. Many of the cities in Kerala face the water scarcity during the month of March to May during which the solar radiation is nearly 900 W/m². In this circumstance it could be strongly recommend that the successful installation of proposed project could be capable of fresh water production to meet the demand.

b) Related work already performed or in progress at your organization or in the state.

A number of studies have been conducted and reported worldwide, however the studies conducted in the state are limited. National institute of technology Calicut is the main organization where the research on desalination was progressing, specifically on floating absorber based still, and a few results are available in the literature. As per the report of G. Sebastian and S Thomas [2], the introduction of floating absorber to the conventional solar still enhances the productivity of the still. The authors observed a maximum efficiency of 88.6%. In addition to this reported study, ore studies on floating absorber based solar stills are under progress in the organization.

c) Related work already performed or in progress at other places in India or abroad.

The technique of extracting fresh water through solar desalination was emerged from the 19th century itself. The working of these solar desalination by employing stills resembles the natural hydrological cycle [3]. However, many modifications have been done on the conventional solar stills and recent studies mainly focus floating type absorber based solar stills. Floating type absorber based solar stills when compared to the conventional stills is equipped with the absorber plate in floated manner. The temperature of fluid in the still have high influence in the performance of the still. Due to this reason reports on solar stills integrated with other heat source are also available with improve productivity. As per the literature the stills integrated with the other heat source exhibits better performance [4,5]. Some of the relevant literatures are summarized in table 1

Table 1.

Summary of some of the relevant international literature

*CSS: conventional solar still

**SS: Solar still

Publisher/Year/ /Country	Integrated system	Solar still type	Remarks
Elsevier/2017/ Algeria [6]	Vertical Rotating wick	CSS	<ul style="list-style-type: none"> • Improve effective surface area for absorption and evaporation • Average thermal efficiency in 20% more than CSS. • Moving wick breaks surface tension which improves heat transfer.
Elsevier/2016/ Egypt [7]	Phase change material	CSS	<ul style="list-style-type: none"> • Daily production is 67% more than CSS • Production is enhanced during night time due to release of latent heat
Elsevier/2015/ Egypt [8]	Use of nanofluids, reflectors and external condensers	Corrugated wick SS	<ul style="list-style-type: none"> • Corrugated wick increases the surface area resulting in more HT • Nano particles are had good thermal storing and heat transfer properties • 285% and 255% productivity when using CuO and Al₂O₃
Elsevier/2014/ Oman [9]	Refrigeration cycle	Inverted SS	<ul style="list-style-type: none"> • Additional heat source into the basin from condenser of the refrigerator • Cooling of glass cover with refrigerator which enhances condensation rate.
Elsevier/2013/ Egypt [10]	Internal reflectors	Stepped SS	<ul style="list-style-type: none"> • Productivity is 75% higher than CSS • More water in stepped basin for same depth, also stepped basin has higher surface area.

Elsevier/2019/ Egypt [11]	Solar dishes with conical tank, PV panels and tracking system	CSS	<ul style="list-style-type: none"> Water in the conical tank is heated with dish collectors The heated water sprayed in basin to enhance evaporation
Elsevier/2019/ Iraq [12]	Underground heat exchanger		<ul style="list-style-type: none"> Water vapor condenses in pipes underground Humidity ratio increases along the length of the still Water production is increased by 50%
Elsevier/2018/ Iran [13]	Nano coating of condensing surface	CSS	<ul style="list-style-type: none"> Nano coating results in drop wise condensation Coated surface gives more distillate at 500 inclinations than 10o Drop wise condensation leads to more dripping
Elsevier/2018/ Iran [14]	Reticular porous media	CSS	<ul style="list-style-type: none"> Sponge rubber is used because it has low Cp Sponge rubber has more surface area Efficiency is less than conventional still at evening time but overall productivity is more
Elsevier/2019/ Iran [15]	Flat plate reflectors with cooling system	Modified SS with angled bars	<ul style="list-style-type: none"> Basin and reflector inclination is adjusted to get maximum solar radiation 14 % more efficient than CSS at 25° inclination

A number of studies on solar desalination are progressing around the world. IIT madras sets India's first solar powered desalination plant in Chennai which could generate 10,000 liters of fresh water. However, research on solar desalination in Indian research also have found a remarkable position among the world research. Arunkumar et al. [16] experimented on the floating type absorber by inducing the porous texture on the absorber and by introducing bubble wrap insulator around the still. As per the authors, this modification enhanced the productivity of the stills from 1.91 l/m² to 3.1 l/m². The state of Tamil Nadu is one of the prominent sources of research, in which the institutions like Indian institute of Technology, Madras, National institute of Technology, Trichy, Anna University Chennai, are the major contributors. IIT madras sets India's first solar powered desalination plant in Chennai. M Muraleedharan et al [17] conducted and experiment by integrating a conventional solar still to a linear Fresnel lens concentrator. The authors claim a 250.27% enhancement in the productivity of modified stills compared to the

conventional still. Likewise, a number of experiments have been conducted in the national level, a brief summary of some of the relevant literature is shown in the Table 2.

Table 2.

Summary of some of the relevant national level literature.

Publisher/Year/Country	Integrated system	Solar still type	Remarks
Elsevier/2019/India [18]	Permanent ferrite rings magnets	CSS	<ul style="list-style-type: none"> • Magnetization of water increased distillate output by 50% • The magnets act as heat storage medium • Magnetization of water increases its evaporation by decreasing surface tension
Elsevier/2019/India [19]	Hollow fins	DSSS	<ul style="list-style-type: none"> • Optimization of fin number and thickness • Water temperature is higher than absorber plate due to fins • Circular hollow fins are better than square hollow fins
Elsevier/2018/India [20]	Peltier based hybrid PV	CSS	<ul style="list-style-type: none"> • Peltier effect is used to cool the condensing surface and heat the absorber plate • 30% more efficient than CSS and 6 times more yield
Elsevier/2019/India [21]	Multiple V shaped floating wicks	CSS	<ul style="list-style-type: none"> • Floating wicks made from black jute cloth wrapped in thermocol • Daily output is more than CSS • Basin water and glass cover temperature is lower and higher than CSS •
Elsevier/2018/India [16]		CSS	<ul style="list-style-type: none"> • Bubble wrap was used to prevent heat loss and carbon impregnated foam to increase surface area • CIF is hydrophilic so the top surface becomes wet when placed in water unlike sponges • Productivity is 35% more

Elsevier/2017/ India [22]	Solar pond and Reflectors	Double basin with stepped upper basin	<ul style="list-style-type: none"> • 105% increase in productivity than CSS • Heat exchange from solar pond and lower basin
Elsevier/2015/ India [23]	Parabolic dish concentrator with cover cooling with charcoal in fins	Triple basin SS	<ul style="list-style-type: none"> • Yield increased by 104% • Cover cooling done by pump • Concentrator increased lower basin temperature by 26o C
Elsevier/2017/ India [24]		Triangular pyramid solar still with inclined still	<ul style="list-style-type: none"> • Yield improved by 79% • Hot water from inclined still is used to increase the productivity of pyramidal still
Taylor and Francis /2017/ India [25]	Air Blower	CSS	<ul style="list-style-type: none"> • Blower causes bubbling effect which increases evaporation • 100% increase in efficiency when using blower
Elsevier/2017/ India [26]	Basin height (mean distance between glass cover and saline water) and stirring of water	CSS	<ul style="list-style-type: none"> • Yield increases with reduction in basin height and stirring • Motor with PV panel is used for stirring • Stirring increases the efficiency by 30 %

Gaps Identified for the literature

A number of solar selective materials were considered to analyze its influence on desalination. However, the parametric studies on floating absorber type solar still are not much explored. Moreover, the attempts to enhance the bulk fluid temperature of solar still is limited.

11. Details of any preliminary work done by the investigator: The carbon dot nanofluids has been synthesized and its influence on direct absorption parabolic collector was established by the investigator. Synthesis procedure, characterization, and performance evaluation on parabolic collector is detailed in the article, “**Albin Joseph, Shijo Thomas*** Energy, exergy and corrosion analysis of ultra-high stable Carbon quantum dot nanofluid employed direct absorption solar collector, Renewable Energy 181 (2022) 752-737.”

12. Detailed year-wise work plan (Indicate methods / Techniques to be used)

Task No	Description	Year 1				Year 2			
		3	6	9	12	15	18	21	24
1	Procurement of equipment and materials	■	■						
2	Synthesis of Carbon dot nanofluid and spectrally selective floating absorber.		■	■					
3	Characterization of synthesized nanofluid and absorber coating.			■					
4	Optimization of synthesis process parameters of carbon dot based nanofluid and floating absorber			■	■				
5	Fabrication and installation of flat plate collector for direct solar adsorption collector and floating type solar stills.			■	■				
6	Evaluating the influence of optimized carbon dot based nanofluid and floating absorber at various working condition.				■	■	■		
7	Report preparation							■	■

The methodology of proposed research is divided mainly into four stages as follows.

Stage 1: Synthesis and parameter optimisation of carbon dot/ Ethylene glycol nanofluid: Ascorbic acid could be used as the carbon source. The carbonisation of ascorbic acid in presence of Cu^{2+} at $150^{\circ}C$ yield the carbon dot. The optimisation of constituent concentration in the preparation of nanofluid needs to be performed to achieve the highly solar selective and stable nanofluid. Base fluid used is the ethylene glycol which could be used for medium temperature heat transfer application due to its desired properties.

Stage 2: Characterization of synthesized carbon dot nanofluid: The optical absorbance of nanofluid could be measured using the UV spectrophotometer. The thermo-physical properties like thermal conductivity and viscosity could be analyzed using the KD2 Pro Thermal Analyzer and Rheometer, respectively. In addition, structural and morphological analysis could be performed, Transmission electron microscopy (TEM) and X-ray Diffraction (XRD).

Stage 3: Preparation and optimisation of coating process parameters floating absorber. Exfoliated graphite or few layer graphene is coating on aluminium sheets through electrophoretic deposition. The process parameters like concentration of electrolyte, electrode separation, electrode potential, and operation time could be optimised using the design of experiment concept.

Stage 4: Design and fabrication of experimental setup: Figure 1 shows the schematic of experimental setup. The experimental setup consists of a flat plate collector and a floating type absorber solar still. The synthesized nanofluid is made to flow through the collector, placed at the focus of flat

plate collector that absorbs the irradiance and subsequent heat conversion takes place. This heat is taken to heat the saline water in the solar still. Further the nanofluid will be directed to a reservoir from which to the inlet of the trough by means of a pump.

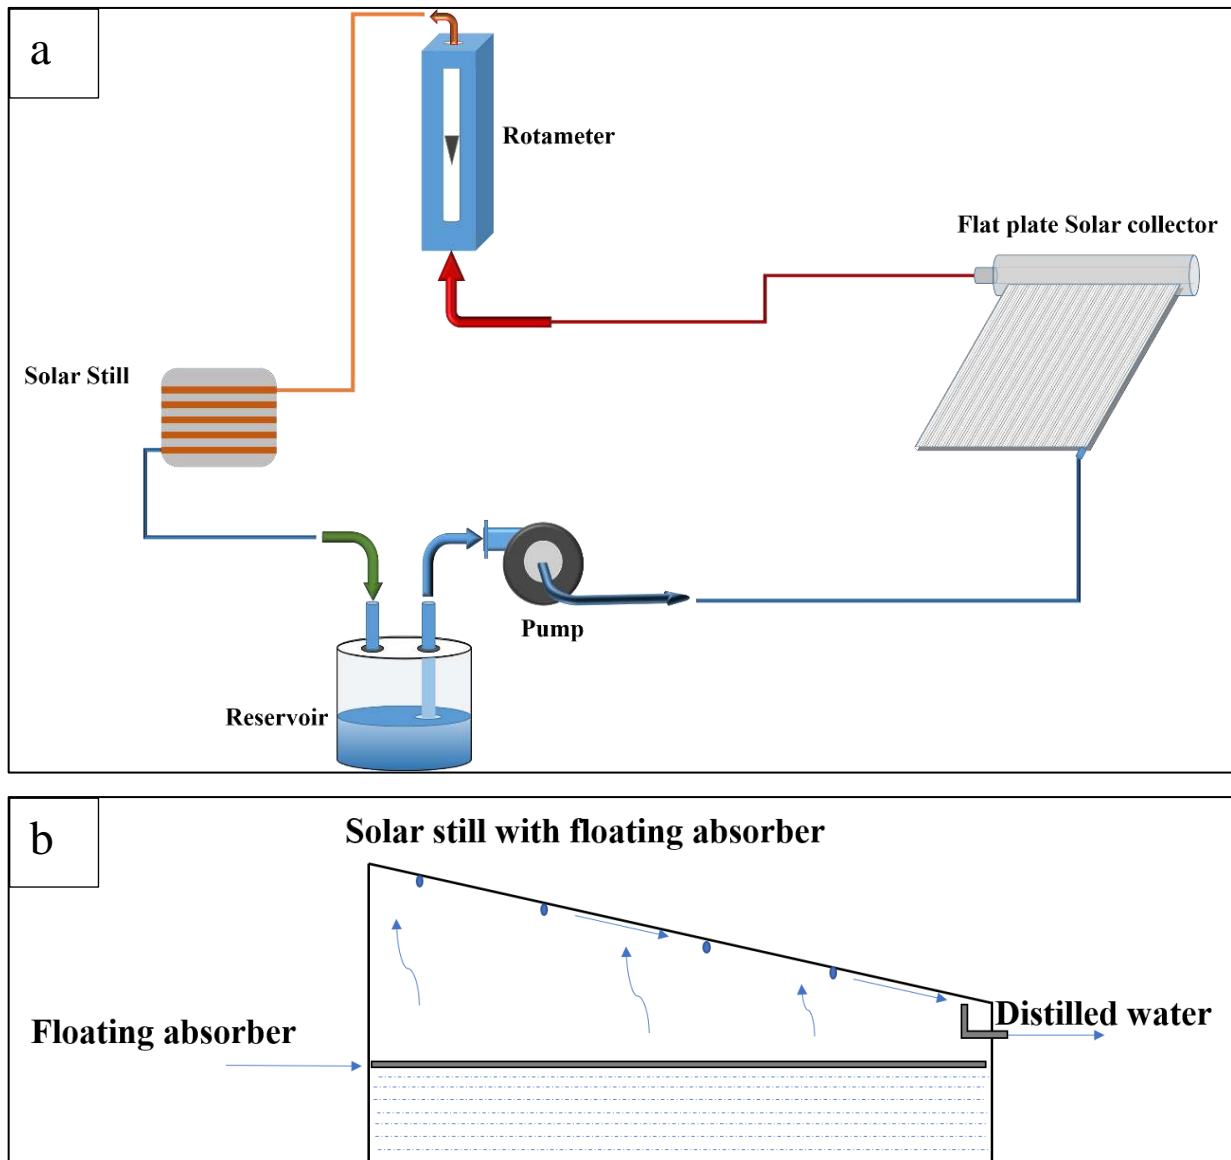


Fig.1. Schematic of experimental setup. a) Hydraulic cycle. b) Floating type Solar still

13. Particulars of equipment required: No additional equipment's required

Sl No	Equipment	Purpose	Availability
1	Hot plate Magnetic Stirrer	Synthesis of C-Dot nanofluid	Available at PI's Institute
2	Weighing Balance	Synthesis of C-Dot nanofluid	Available at PI's Institute

14. Particulars of any other facilities required: Characterization of C-Dot Nanofluid could be done at STIC at payment basics.

15. Particulars of the facilities that will be provided by the institution where this project will be implemented:

Sl No	Facility	
1	Workshop facility	Yes
2	Magnetic Stirrer	Yes
3	Weighing Balance	Yes

16. Whether the project was submitted to any other organization for financial support: No

17. Budget Details: Estimated expenditure

Sl No	Items	First Year	Second Year	Amount (Rs)	Justification
1	Consumables	40,000	20,000	60,000	<ul style="list-style-type: none"> • Purchase of chemicals like, ascorbic acid, copper acetate, Sodium Hydroxide etc. • To meet the expense for the fabrication of solar collector
2	Equipment			Nil	
3	Travel	10,000	10,000	20000	<ul style="list-style-type: none"> • The travel fund is mainly required for meeting the expenses in connection with the visits required for various characterization and testing not available at the institute • Attending peer reviewed conference in India and also for attending the review meetings.
4	Contingency	15,000	15,000	30000	<ul style="list-style-type: none"> • Characterization of C-Dot Nanofluid. TEM, XRD, BET, UV-vis-NIR spectroscopy etc are the characterization that are required to perform.
	Total	65,000	45,000	1,10,000	

18. The sources of funding the project including funds from other agencies from which financial assistance is obtained/expected to be obtained, and the quantum of assistance from each agency: NIL

19. Quantum and nature of assistance expected from the APJAKTU: Financial support

20. Name and address of the authority of Institution authorized to receive the grant:

SCMS School of Engineering and technology
Vidya Nagar, Palissery, Karukutty,
Kerala 683582

21. Whether grant under this scheme had been availed earlier by the investigator: (If so, provide details): NO

22. Details of projects already undertaken by the Principal Investigator with any other funding agency: NO

References

- [1] Energy Information Administration of USA
- [2] Sebastian, Geo, and Shijo Thomas. "Influence of providing a three-layer spectrally selective floating absorber on passive single slope solar still productivity under tropical conditions." *Energy* 214 (2021): 118848.
- [3] Ali Jaber Abdulhameda, Nor Mariah Adama, Mohd Zainal Abidin Ab-Kadira, Abdul Aziz Hairuddina, Review of solar parabolic-trough collector geometrical and thermal analyses, performance, and applications, *Renewable and Sustainable Energy Reviews* 91 (2018) 822–831.
- [4] Alibakhsh Kasaeian, Reza Daneshzarian, Roya Rezaei, Fathollah Pourfayaz, Ghasem Kasaeian, Experimental investigation on the thermal behaviour of nanofluid direct absorption in a trough collector, *Journal of Cleaner Production* 158 (2017) 276 - 84
- [5] Sanaz Akbarzadeh, Mohammad Sadegh Valipour, Heat transfer enhancement in parabolic trough collectors: A comprehensive Review, *Renewable and Sustainable Energy Reviews* 92 (2018) 198–218.
- [6] Zakaria Haddad, Abla Chaker, Ahmed Rahmani, Improving the basin type solar still performances using a vertical rotating wick, *Desalination* 418 (2017) 71–78
- [7] A.E. Kabeel, Mohamed Abdelgaied, Improving the performance of solar still by using PCM as a thermal storage medium under Egyptian conditions, *Desalination* 383 (2016) 22–28
- [8] Z.M. Omara, A.E. Kabeel, F.A. Essa, Effect of using nanofluids and providing vacuum on the yield of corrugated wick solar still, *Energy Conversion and Management* 103 (2015) 965–972
- [9] Sabah A. Abdul-Waha, Yousuf Y. Al-Hatmi, Study of the Performance of the Inverted Solar Still Integrated with a Refrigeration Cycle, *Procedia Engineering* 33 (2012) 424 – 434
- [10] Z.M. Omara, A.E. Kabeel, M.M. Younes a, Enhancing the stepped solar still performance using internal reflectors, *Desalination* 314 (2013) 67–72
- [11] A.E. Kabeel, Mohamed M. Khairat Dawood, Khaled Ramzy, Tamer Nabilb, Basem Elnaghib, Ahmed elkassarb, Enhancement of single solar still integrated with solar dishes: An experimental approach, *Energy, Conversion and Management* 196 (2019) 165–174

- [12] Salman H. Hammadi, Integrated solar still with an underground heat exchanger for clean water production, *Engineering Sciences* (article in press)
- [13] Peyman Zanganeh, Ataallah Soltani Goharrizia, Shahab Ayatollahib, Mehrzad Feilizadeh, Productivity enhancement of solar stills by nano-coating of condensing Surface, *Desalination* 454 (2019) 1–9
- [14] Saman Rashidi, Nader Rahbar, Mohammad Sadegh Valipour, Javad Abolfazli Esfahani, Enhancement of solar still by reticular porous media: Experimental investigation with exergy and economic analysis, *Applied Thermal Engineering* 130 (2018) 1341–1348
- [15] Faezeh Ketabchi, Shiva Gorjian, Saba Sabzehparvara, Zahra Shadrama, Mahshid Sadat Ghoreishia, Hassan Rahimzadeha, Experimental performance evaluation of a modified solar still integrated with a cooling system and external flat-plate reflectors, *Solar Energy* 187 (2019) 137–146
- [16] T. Arunkumar, A.E. Kabeel, Kaiwalya Raj, David Denkenberger, Ravishankar Sathyamurthy, P. Ragupathy f, R. Velraj a, Productivity enhancement of solar still by using porous absorber with bubble-wrap insulation, *Journal of Cleaner Production* 195 (2018) 1149-1161
- [17] M. Muraleedharan, H. Singh, S. Suresh, M. Udayakumar, Directly absorbing Therminol-Al₂O₃ nano heat transfer fluid for linear solar concentrating collectors, *Solar Energy* 137 (2016) 134–142
- [18] Pankaj Dumka, Yash Kushwah, Aman Sharma, Dhananjay R. Mishra, Comparative analysis and experimental evaluation of single slope solar still augmented with permanent magnets and conventional solar still, *Desalination* 459 (2019) 34–45
- [19] Hardik K. Jania, Kalpesh V. Modi, Experimental performance evaluation of single basin dual slope solar still with circular and square cross-sectional hollow fins, *Solar Energy* 179 (2019) 186–194
- [20] P. Pounraj, D. Prince Winston, A.E. Kabeel, B. Praveen Kumar, A. Muthu Manokar, Ravishankar Sathyamurthy, S. Cynthia Christabel, Experimental investigation on Peltier based hybrid PV/T active solar still for enhancing the overall performance, *Energy Conversion and Management* 168 (2018) 371–381
- [21] Abhay Agrawal, R. S. Rana, Theoretical and experimental performance evaluation of single slope single-basin solar still with multiple V-shaped floating wicks, *Heliyon* 5 (2019) e01525.
- [22] S. Joe Patrick Gnanaraj, S. Ramachandran, David Santosh Christopher Enhancing the design to optimize the performance of double basin solar still, *Desalination* 411 (2017) 112–123
- [23] K. Srithar, T. Rajaseenivasan, N. Karthik, M. Periyannan, M. Gowtham, Stand alone triple basin solar desalination system with cover cooling and parabolic dish concentrator, *Renewable Energy* 90 (2016) 157-165
- [24] P. Naveen kumar, A. Muthu Manokar, Madhu. B, A.E. Kabeel, Arunkumar. T, Hitesh panchal, Ravishankar sathyamurthy, Experimental investigation on the effect of water mass in triangular pyramid solar still integrated to inclined solar still, *Groundwater for Sustainable Development*, 5(2017) 229-234
- [25] Nivin Joya, Alphons Antony, A Anderson, Experimental study on improving performance of solar still using air blower ,39(2017)613-616
- [26] T. Rajaseenivasan, R. Prakash, K. Vijayakumar, K. Srithar, Mathematical and experimental investigation on the influence of basin height variation and stirring of water by solar PV panels in solar still, *Desalination* 415(2017) 67-75

Declaration

Certified that the details furnished above are correct to the best of my knowledge and belief and that the amount of financial assistance, if granted, will be utilised for the purpose for which it is granted within the time prescribed by APJAKTU. I also undertake to abide by the rules and other conditions prescribed by the grantee.

Name and Signature of the Investigator *Dr. Albin Joseph*
[Signature]

[Signature]
Name and Signature of Head of the Institution

Place: *Karukutty*
Date: *28-4-2022*



APJ ABDUL KALAM TECHNOLOGICAL UNIVERSITY

CENTRE FOR ENGINEERING RESEARCH AND DEVELOPMENT

College of Engineering Trivandrum Campus

Thiruvananthapuram, Pin 695016.

APPLICATION FORMAT FOR STUDENT PROJECT

SECTION A: GENERAL INFORMATION

1. Name of the Principal Investigator : VINOJ P G, ASSISTANT
PROFESSOR, ELECTRONICS AND
COMMUNICATION ENGINEERING
DEPARTMENT, SCMS SCHOOL ENGINEERING
AND TECHNOLOGY, KARUKUTTY

(Faculty who is guiding the project)

Phone no : 9446276238

Email id : vinojpg@scmsgroup

2. Name of the Co-Investigator : Dr. VARUN G MENON, HOD &
PROFESSOR, COMPUTER SCIENCE AND
ENGINEERING DEPARTMENT, SCMS SCHOOL
OF ENGINEERING AND
TECHNOLOGY, KARUKUTTY

(Faculty who is co- guiding the project)

Phone no : 8714504684

Email id : varunmenon@scmsgroup.org

3. Name(s) of Student investigators : ANANDU SURESH, SAGAR P GOKUL,
SAYOOJ M.J, YUNUS A A
Semester : S7 BTECH
Branch : ELECTRONICS AND COMMUNICATION

4. Address of the Institution : SCMS SCHOOL OF ENGINEERING AND
TECHNOLOGY, KARUKUTTY
683576, ANGAMALY

5. Title of the project proposal : FOREST FIRE FIGHTING USING FPV DRONE


(Attach biodata of 1, 2 & 3)

Terms and Conditions


1. The scheme is constituted for the purpose of providing assistance in the form of grants to students for scientific project work with particular relevance to the State of Kerala in the economic and industrial development.
2. Grant will be reimbursed to the principal investigator after the completion of the project through the Head of the institution.
3. The maximum duration of the project will be one year from the date of start of the project.
4. On completion of the project, one copy of the final project report on the work done should be sent to CERD along with the utilization certificate (UC), certified bills, bill wise statement and statement of expenditure (SE).
5. The institute shall maintain separate audited accounts for the project.

6. The institute shall not entrust the implementation of the work for which the grant is being sanctioned to another institution nor shall divert the grant receipts to other institutes as assistance.
7. The CERD reserves the right to terminate the project at any stage if it is convinced that the grant has not been properly utilized or appropriate progress is not being made. In addition, the CERD may designate Scientist/Specialist or an Expert Panel to review the work done.
8. If the PI to whom the project has been sanctioned leaves the Institution, the Head of Institution/PI shall inform the same to the CERD and in consultation with the CERD, evolve steps to ensure successful completion of the project, before relieving the PI.
9. Investigators must acknowledge the CERD in reports and technical/scientific papers publishing based on the work done under the project. Investigators are requested to publish papers emerging out of the project work in leading Journals.
10. If the results of project work are to be legally protected by way of patent/copy rights etc. the results should not be published without action being taken to secure legal protection for the project results.
11. The knowledge generated from the project will be the property of CERD and should be properly acknowledged. Transfer of technology generated shall be done in consultation with the CERD.
12. For Private self financing Colleges, 50% of the actual Equipment cost subjected to the maximum of sanctioned amount will be reimbursed by KTU if and only if the proof of remittance of other 50% is produced by the college.
13. Equipment details must be entered in the stock register of the college and signed by the Investigator, Lab in charge and Principal.
14. The CERD may enforce additional guidelines for the operation of the student project from time to time and the Institution/Investigators are required to observe such directions in the conduct of the project work.


We agree to the terms and conditions stated above.


Name & Signature of
Principal Investigator
VINOJ P.G.

Name & Signature of
Prof-in-charge,
Satellite Centre


Name & Signature of
Head of Institution

Dr. ANITHA G. PILLAI
PRINCIPAL
SCMS SCHOOL OF ENGINEERING
AND TECHNOLOGY



APJ ABDUL KALAM TECHNOLOGICAL UNIVERSITY
CENTRE FOR ENGINEERING RESEARCH AND DEVELOPMENT
College of Engineering Trivandrum Campus
Thiruvananthapuram - Pin 695016.

APPLICATION FORMAT FOR STUDENT PROJECT

SECTION B: TECHNICAL DETAILS

1. (a) Title of the Project Proposal: **FOREST FIRE FIGHTING USING FPV DRONE**

(b) Branch / Subject area : Electronics and Communication Engineering/

(c) Project Type (Developmental / Demonstration / Others): **Demonstration**

2. Precise objective (150 words):


Looking into history, as we can see lots of fire incidents and accidents that can result in a huge amount of damage and losses for people involved in it. Fire fighters are the primary help which we look for but how much can they help. Let see some of the problems faced by fire fighters. Firstly, forest wildfires mainly fires in central forest are very difficult to reach and when they reach there the fires will be spread to its surrounding areas. Lots of accidents like fires in high rise buildings, fires in home, fires in stadium etc. Drones are usually flying unmanned robot that can be remotely accessed or to fly freely through software-controlled flight plans in their embedded systems. This technology provides various applications not only in firefighting operation but also in the field of aerial surveillance and monitoring. Thus, we propose a firefighting FPV drone to counter the threats caused by fire.

3. Abstract (400 words):

We will be designing a fully stable, compatible FPV which can be easily controlled and operated by human beings for firefighting operations. We have seen these FPVs and drones for the past decades and they are performing different operations which are assigned to them. By the rapid growth and advancements in technology, the areas or field of applications of these devices are implemented becoming huge. Fire accidents are quick and spreads fastly making us unresponsive to fight against it. We are focusing on a FPV which can be implemented in the live fire accidents to reduce and control fire, and also it should be budget friendly. Several accidents are occurred to fire fighters during their operation. By using Fire Fighting FPV fire accidents can be easily spotted and it can be easily extinguished without causing any hazards to human beings. Our FPV will rapidly respond to fire fighter's commands which will help them to extinguish fire at heights. Our project focuses on the great social service which helps to reduce the loss of property and assets of


people and can provide them better and reliable living and working conditions. We have briefly explained the operation of the FPV and also conducted various experiments that emphasizes its core working.

4. Methodology including the work plan:
(Attach separate sheet if needed)

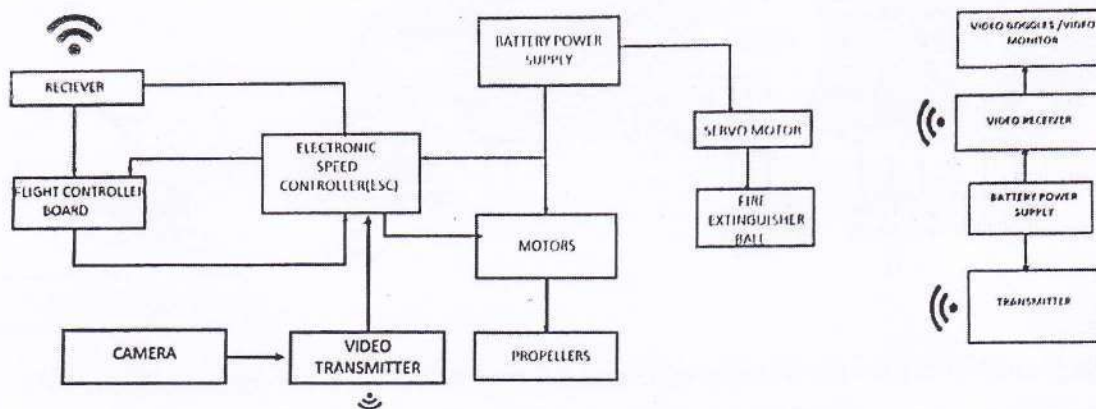

In the drone, the receiver will receive the signals once they have been delivered by the transmitter. The flight controller processes the signal from the receiver along with the information given by the sensors employed like gyroscope and accelerometer. The ESC (Electronic Speed Controller) will receive the signal once it has been analyzed by the flight controller, and it will then decide how much power should be supplied to the motor. Mechanical connections allow the propellers to revolve and generate thrust from the motors. The fire extinguisher ball's shell is opened by a servo motor that is driven by the transmitter. The motors with sufficient torque is designed to produce the thrust for carrying the drone mechanical structure and extinguisher ball. The user can view the forest sight remotely from his location and control the motion of the FPV. The FPV can also be programmed for the Automatic detection of the Fire prone regions and activate the delivery of extinguisher ball in the absence of manual control. Once the fire is detected alerts can be given to the take over the manual control. Thus the system detects the forest fire and delivers the extinguisher ball at appropriate location and sufficiently early to prevent the further spread of the fire.

CIRCUIT DIAGRAM :

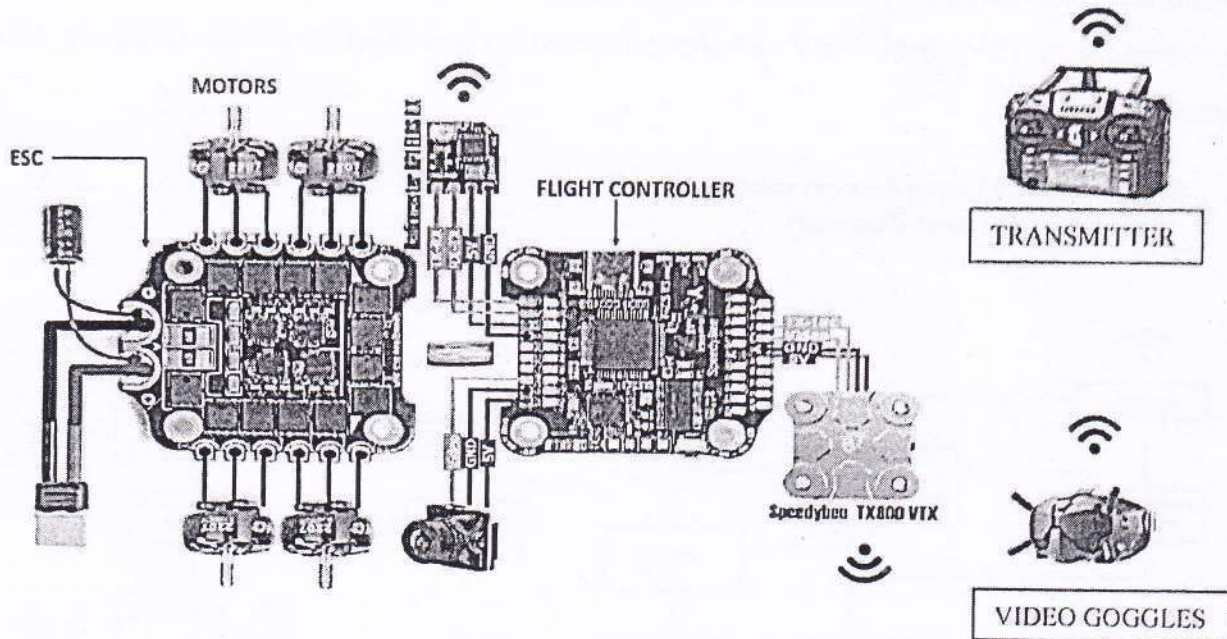

The circuit diagram shows how the video goggle and RF transmitter communicates with the FPV wirelessly. The 12v Lippo batteries will be utilized for powering the system. The flight controller and ESC communicates through I2C Interface for the stable operation of the Drone. High torque motors are interfaced to ESC along with the propellers to produce the required thrust for lifting the FPV. The Camera module is interface to the Flight controller for capturing the live video feed of the area under surveillance. The controller also processes the sensor feedback information for providing better stability for the FPV during the flight.

Phase	Outcomes	Means/ Tools	Duration
1	Interfacing Sensor with controller	Components:- MAMBA F406 MK2+F50 Flight controller stack Tools:- Beta Flight software, PCB design software	2 week
2	Interfacing actuators with controller	Components:- Servo motors, BLDC motor, Transmitter and Receiver Tools:- PCB Design Software	2week
3	Design of Charging unit	Components:- Li-Po battery, Li-Po battery Charger	2 week

4	Fire extinguishing ball testing	Components:- Fire extinguishing ball	2 weeks
5	Deployment, Assembly and testing	Tools:- Soldering Iron, Multi-meter, 3D printer, 3D modeling software, PCB design software, Beta Flight software.	6 week

5. Application / importance in the socioeconomic context:

- 1) Can be used in confined spaces
- 2) Easy to extinguish fire at heights
- 3) Used to locate victims
- 4) Helps to reduce the direct involvement of fire fighters during their operation.
- 5) Prevents Natural calamity like forest fire
- 6) Save the Life of Animals, plants and preserves the forest region
- 7) Alerts the authority when initial fire hazards occurs

6. Particulars of equipment required: NA
(Equipment only to govt / govt supported institutions)

7. Particulars of any other facilities required:

- 1) 3D printers
- 2) Soldering
- 3) Electronics work bench
- 4) PCB Milling Machine

8. Particulars of the facilities that will be provided by the institution where this project will be implemented:

- 1) 3D printers
- 2) Soldering
- 3) Electronics work bench
- 4) PCB Milling Machine

9. Whether the scheme was submitted to any other organization for financial support, if so, the names of the institutions and their decisions may be indicated: NO

10. Budget Details: Estimated expenditure

SI No	Items	Amount (Rs)
1	Consumables (Do not exceed 20% of the total amount)	10,000/-
2	Equipment (For Private self financing Colleges, 50% of the actual Equipment cost subject to the maximum of sanctioned amount shall be borne by the college)	10,000/-
3	Travel (Do not exceed 10% of the total amount)	5,000/-
4	Contingency (Do not exceed 10% of the total amount)	5,000/-
	Total	30,000/-

Budget Justification:

1. Consumables: Rs 10,000/-(Ten Thousand): Purchase of components like battery, PLA material for 3d printing, PCB Manufacturing Materials, Development boards, LED, Resistors, Propellers, Frame structure etc.

2. Equipment : Rs 10,000/-(Ten Thousand) :Purchase of electronic Equipment like Multi-meter, MAMBA F406 MK2+F50 Flight controller stack ,Servo motors, BLDC Motors,

3. Travel: Rs 5,000/-(Five Thousand)

Travel Budget will be utilized for meeting forest authorities, NGO and subject experts

4. Contingency: Rs 5,000/-(Five Thousand)

Contingency Fund is utilized for patent filing, medical committee approval, to cover unforeseen risks during device testing

Signature of Principal Investigator:
Name, Address & Telephone No:

VINOJ PG,
ASSISTANT PROFESSOR, DEPARTMENT OF
ELECTRONICS AND COMMUNICATION
ENGINEERING, SCMS SCHOOL OF
ENGINEERING AND TECHNOLOGY,
KARUKUTTY-683576
MOB: 9446276238

Place: Karukutty
Date: 22/12/2022



APJ ABDUL KALAM TECHNOLOGICAL UNIVERSITY

College of Engineering Trivandrum Campus, Thiruvananthapuram. Pin 695 016

Application for Research Seed Money

1. Title of the Research Proposal: Fatigue studies and resilient behavior of crushed brick – fly ash – lime (CBFL) mix for use in base layer of flexible pavement

2. Name & address & experience of Investigator
(Mobile No. and e-mail are mandatory)

Rahul R. Pai

Assistant Professor, Dept. of Civil Engineering

SCMS School of Engineering & Technology, Karukutty

Email ID: rahul@scmsgroup.org

Mob no: 9061996111

Experience: 4 years of industrial experience in STRABAG International GmbH, 4 years of research experience as research fellow in DST funded project at NIT Surat, 3.5 years of teaching experience.

3. Teaching experience: 3 years & 6 months

4. Objectives of Research (150 words)

- i. To develop fatigue performance models for crushed brick – fly ash – lime (CBFL) mix from four-point beam fatigue test at various stress levels and subsequently predict the fatigue life of the mix.
- ii. To perform repeated load tri-axial test on the CBFL mix and determine the resilient modulus and permanent deformation of the mix.
- iii. To study the effect of curing period on the strength gain of CBFL mixes by conducting microstructural study involving X-Ray Diffraction (XRD) analysis and Scanned Electron Microscope (SEM) observations.
- iv. To develop correlation between the flexural strength and flexural modulus of the CBFL mix.

5. Broad Subject area / field of classification: Pavement Geotechnics

6. Project Type(s) (Basic Research / Applied Research / Developmental / Demonstration / Others: Developmental)

7. Abstract (400 words)

Natural aggregates are indispensable for the construction, maintenance, and widening of highway projects. The construction of flexible pavement consumes around 15,000 tons of natural aggregates per km length of the road, leading to the inadequacy of the most essential construction component. The extraction of natural aggregates from quarries is a major concern as far as ecological balance is concerned. On the other hand, in a developing country like India, rapid industrialization is leading to the generation of large quantity of construction & demolition wastes as well as industrial wastes. Huge open dumps of these industrial wastes not only make the valuable land futile but also are a threat to the ecology and public health. This study mainly focuses on the fatigue behavior and resilient response of crushed brick – fly ash – lime (CBFL) mix for use as a base layer in flexible pavement. The fatigue response of cemented base layers is very essential in assessing the required maintenance frequency and the life cycle of bound layers in flexible pavement. Apart from the aforementioned studies, the effect of curing period on the strength gain of CBFL mixes will also be studied by conducting microstructural study involving X-Ray Diffraction (XRD) analysis and Scanned Electron Microscope (SEM) observations. The results from this study can be used to develop innovative design methodology and guidelines for the utilization of crushed bricks and fly ash in the cemented base layer of flexible pavement.

8. Scientific scope of the Research proposal (400 words)

In recent years, there has been a growing emphasis and interest all over the world towards promoting the use of marginal materials in road construction in order to improve the construction cost efficacy, reduce depletion of good quality aggregates and also to protect valuable land from the disposal of construction & demolition wastes as well as industrial wastes. Bulk utilization of crushed bricks and fly ash as potential pavement materials will significantly avert the issues related to its disposal. The innovative cemented crushed brick – fly ash – lime (CBFL) mix proposed in this study will not only solve the problems associated with the disposal of wastes and depletion of natural aggregates, but also enables to increase the service life of flexible pavement constructed with this cemented waste mix in base layer, without compromising the construction cost. The results from fatigue studies and resilient response of the CBFL mix will be very useful for recommending appropriate design for use of such cemented mixes in the base layers of flexible pavements.

9. Applications / Socioeconomic importance / Relevance, if any, for the utilization and management of the natural resources of the State)

- The technology of utilizing cemented crushed brick – fly ash – lime (CBFL) mix in base layer of flexible pavement can be disseminated among government agencies and contractors for effective utilization of these wastes and subsequently averting the issues related to its disposal.
- The results from this study can be used to develop innovative design methodology and guidelines for the utilization of crushed bricks and fly ash in the cemented base layer of flexible pavement.
- Trial flexible pavement sections with the CBFL mix (chosen based on the laboratory investigations) in the base layer can be constructed with the assistance of Public Works Department (PWD), Government of Kerala and the field performance of the trial sections can be evaluated to ascertain the benefits of implementing such wastes as a potential pavement material.

10. Scientific background of the project

a) Importance of the problem

Construction and demolition (C&D) wastes along with commercial and industrial wastes account for more than 80% of the waste materials. During the last few decades, it has been recognized with growing concern that C&D wastes are increasing year by year in large volumes and account for a large proportion of the waste materials present in landfills. Concrete, brick, and asphalt account for close to 50% by weight of all C&D wastes. Recycled crushed brick, recycled concrete aggregate, and excavated rock are however viable alternative materials for natural construction materials in engineering applications such as pavement base/subbase and other road construction applications. Utilization of natural aggregate resources for the construction of flexible pavement has led to uncontrollable quarrying in the state of Kerala. The recent landslides in Kerala which took the lives of many people is the aftermath of extensive quarrying activities. This has led to the urgent need of including innovative materials in the road construction. Crushed bricks and fly ash proposed in this project can be successfully utilized in flexible pavements with lower construction cost without compromising the strength and durability requirements. This will also lead to the protection of scarce natural aggregates resources and savings in disposal cost of construction & demolition wastes on valuable land. Thus it is a technology for sustainable development.

b) Related work already performed or in progress at other places in India or abroad.

In the past, researchers have evaluated the sustainability of C&D waste materials (Joel and Agbede 2011, Arulrajah et al. 2012) and some countries have been using recycled C&D materials in civil engineering applications, but there is still sufficient scope for wider engineering applications of such recycled materials. The reuse of

recycled C&D wastes in civil engineering infrastructure applications will result in a low carbon solution, considering that recycled materials have significant carbon savings compared with virgin quarried materials. C&D materials have been used in recent years in various civil engineering applications such as roads, embankments, pipe bedding, and backfilling. Various researchers have reported the physical and shear strength characteristics of unbound C&D wastes. Other researchers have studied the strength characteristics after cement-treatment of these waste materials, especially for the application of cement treated C&D wastes in pavement applications (Mohammadinia et al. 2016; Arulrajah et al. 2013) and fly ash–stabilized RAP aggregate (Li et al. 2007, 2011). The improvement in the engineering properties of unbound crushed bricks (CB), recycled concrete aggregate (RCA), and reclaimed asphalt pavement (RAP) when stabilized with general portland (GP) cement was also reported (Mohammadinia et al. 2016). The implementation of fly ash as a filler material and steel slag & copper slag as aggregates in lime-fly ash concrete for use as base layers of flexible pavement is substantiated by Pai et al. (2021, 2022).

Despite voluminous research on various laboratory parameters, very few studies are carried out to evaluate the fatigue response of C&D waste mixes, industrial waste mixes etc. Flexural strength and flexural modulus are the decisive parameters used to assess the fatigue performance of cemented base materials in the field under long-term traffic loading (Zhang et al. 2009). The failure of the cemented base layer in flexible pavement occurs due to the accumulation of flexural stresses and strains at the bottom of the base layer. Flexural modulus which measures the resistance of a material under bending stress is essential to predict the fatigue life of cemented base layers. Lower flexural modulus will result in the development of higher tensile stresses at the bottom of the cemented base layers, subsequently leading to bottom-up tensile cracking. The exposure of flexible pavement with cemented base layers to significant traffic volume will lead to fatigue damage of cemented base layers, ultimately reducing the flexural modulus (Yeo et al. 2002).

The crushed brick – fly ash – lime (CBFL) mix can be implemented as a cemented base layer in flexible pavement with full confidence only if the fatigue behavior and resilient response under the stresses prevailing under field traffic conditions are studied. The parameters such as resilient modulus, permanent deformation, flexural modulus and fatigue life obtained from the repeated load tri-axial test and four-point beam fatigue test performed in the laboratory under different stress levels prevailing in the field are essential for recommending appropriate design for use of such cemented mixes in the base layer of flexible pavements.

11. Details of any preliminary work done by the investigator

The strength characteristics of the crushed brick – fly ash – lime mix were evaluated for various mix proportions by performing unconfined compressive strength test and California bearing ratio test. The adopted mix proportions are given below.

Mix proportions adopted for strength tests

CB (% by dry weight)	FA (% by dry weight)	Lime (%)	Designation
30	70	5	30CB-70FA-5L
50	50	5	50CB-50FA-5L
70	30	5	70CB-30FA-5L

CB – crushed brick, FA – fly ash, L – lime

Details of UCS & CBR tests

The UCS tests were performed on all the aforementioned mixes of specimen size 100 mm diameter and 200 mm height cured for 0, 7, 14, 28 and 180 days as per IS 2720 Part 10, 2006. CBR tests were performed on specimens cured for 7 days and soaked for 4 days as per IS 2720 Part 16, 2016. The results of UCS and CBR tests are given below.

UCS test results

CBFL mix	0 day (MPa)	7 days (MPa)	14 days (MPa)	28 days (MPa)	180 days (MPa)
30 CB - 70 FA - 5L	0.29	1.89	3.52	5.81	7.26
50 CB - 50 FA - 5L	0.30	1.73	3.31	5.33	6.51
70 CB - 30 FA - 5L	0.31	1.50	3.10	4.95	5.82

CBR test results

CBFL mix	Soaked CBR (%)
30 CB - 70 FA - 5L	96
50 CB - 50 FA - 5L	84
70 CB - 30 FA - 5L	75

Even though all the three CBFL mixes satisfied the IRC criteria (IRC SP 20, 2002) of minimum UCS > 4.5 MPa after 28 days curing for use in base layer of flexible pavement, 70 CB + 30 FA stabilized with 5% Lime was chosen as the optimum mix, in order to maximize the utilization of crushed brick and minimize the utilization of fly ash which has considerable utility in construction industry. The fatigue behavior and resilient response of the chosen CBFL (70 CB – 30 FA – 5 L) mix will be evaluated in this particular project.

12. Detailed year-wise work plan (Indicate methods / Techniques to be used)

Detailed work plan of the project:

Sl. No.	Details of activities	Period in months												
		1	2	3	4	5	6	7	8	9	10	11	12	
1	Review of the relevant literature.	■	■											
2	Collection of raw materials		■											
3	Sample preparation			■	■	■	■	■	■					
4	Laboratory tests: Repeated load tri-axial test Four point beam fatigue test				■	■	■	■	■	■				
5	Microstructural analysis					■	■	■	■	■	■			
8	Compilation of results												■	
9	Report writing												■	■

Methodology

The methodology adopted for the study is elaborated below:

(a) Preparation of specimen

The samples of 100 mm diameter and 200 mm height will be prepared for repeated load tri-axial test. The samples will be cured for 0, 7, 28, 180 and 270 days before conducting the test. The flexural strength test and fatigue life test will be performed on beam specimens of CBFL mix of size 100 mm x 100 mm x 400 mm cured for 28 days.

(b) Repeated load tri-axial test

The repeated load tri-axial (RLT) tests will be performed in a cyclic tri-axial test equipment to evaluate the resilient modulus and permanent deformation. The test will be performed for the stress levels stipulated by AASHTO (American Association of State Highway and Transportation Officials) T 307 (AASHTO 2000).

(c) Four-point beam fatigue test

Flexural strength tests of the 28 days cured beam specimens will be performed as per

the test procedure given by Austroads test method AGPT/T600 (Austroads 2018) using four-point beam fatigue test apparatus with dynamic actuator. The same test setup will be used for determining the flexural modulus and fatigue life of the beam specimens.

(d) Microstructural analysis

The strength enhancement of the optimum CBFL mix with curing period will be studied at the micro level using X-Ray Diffraction (XRD) analysis and Scanned Electron Microscope (SEM) images. The XRD and SEM analysis will be performed on 0, 7, 28, 90, 180 and 270 days cured specimens.

(e) Development of model & useful correlations

Fatigue performance models for various stress levels will be developed based on the results of four-point beam fatigue tests. Correlation between the flexural strength and flexural modulus will be developed using the results.

13. Particulars of equipment required

Sl. No.	Equipment name	Purpose in current project	Source of equipment
1	Repeated load tri-axial test apparatus	To determine the resilient response of the mix	NIT, Surat
2	Test setup for flexural strength test with dynamic actuator	To perform four-point beam fatigue test	NIT, Surat
3	X-Ray Diffraction (XRD) analysis	Micro-structural analysis	CUSAT, Kalamassery
4	Scanned Electron Microscope (SEM)	Micro-structural analysis	CUSAT, Kalamassery

Note: The specimens will be prepared in the laboratory facility provided at SCMS School of Engineering & Technology and the testing will be performed at NIT Surat and CUSAT, Kalamassery. Transportation cost will be incurred in the project to transport the specimens to the test facility.

14. Particulars of any other facilities required: NIL

15. Particulars of the facilities that will be provided by the institution where this project will be implemented

Sl. No.	Infrastructural Facility
1	Water & Electricity
2	Power Generator
3	AC rooms or AC
4	Telecommunication including e-mail & Fax
5	Administrative/ Secretarial Support
6	Information facilities like Internet/ Library
7	Computational facilities
8	Laboratory facilities for sample preparation & preliminary tests

16. Whether the project was submitted to any other organization for financial support: NO

17. Budget Details: Estimated expenditure

Sl. No.	Items	Amount (Rs.)	Justification
1	Consumables (Do not exceed 20% of the total amount)	20,000	
2	Equipment (For Private self-financing Colleges, 50% of the actual Equipment cost subject to the maximum of sanctioned amount shall be borne by the college)	NIL	The major testing will be performed at NIT Surat
3	Expense for micro-structural analysis - X-Ray Diffraction (XRD) analysis and Scanned Electron Microscope (SEM)	32,000	XRD analysis and SEM observations is required for the specimens of optimum CBFL mix cured for 0, 7, 28, 90, 180 and 270 days. Approximately 2 specimens will be analyzed for each curing period
4	Minor fabrication works	18,000	Fabrication of molds for casting beam specimens of CBFL mixes
5	Minor expenses required at test facility in NIT, Surat	10,000	Small repairing costs may be incurred for Repeated load tri-axial test apparatus & dynamic actuator during testing
6	Travel (Do not exceed 10% of the total amount)	10,000	Transportation cost of specimens to the test facility at NIT Surat and CUSAT, Kalamassery
7	Contingency (Do not exceed 10% of the total amount)	10,000	
	Total	1,00,000	

18. The sources of funding the project including funds from other agencies from which financial assistance is obtained/expected to be obtained, and the quantum of assistance from each agency: NIL

19. Quantum and nature of assistance expected from the APJAKTU: Full financial support

20. Name and address of the authority of Institution authorized to receive the grant

**SCMS School of Engineering & Technology
Vidya Nagar, Palissery, Karukutty,
Kerala 683 582**

21. Whether grant under this scheme had been availed earlier by the investigator: (If so, provide details): NIL

22. Details of projects already undertaken by the Principal Investigator with any other funding agency: NIL

References

1. Austroads (2018). "Flexural beam test methods for cemented materials." *AGPT/T600*. Sydney, Australia.
2. Arulrajah, A., Piratheepan, J., Bo, M.W., Sivakugan, N. (2012), "Geotechnical characteristics of recycled crushed brick blends for pavement sub-base applications, *Can. Geotech. J.* 49: 796–811
3. Arulrajah, A., Piratheepan, J., Disfani, M. M., and Bo, M.W. (2013), "Geotechnical and geoenvironmental properties of recycled construction and demolition materials in pavement subbase applications." *J. Mater. Civ. Eng.*, 10.1061/(ASCE)MT.19435533.0000652, pp. 1077–1088
4. Joel, M. and Agbede, J. O. (2011), "Mechanical-cement stabilization of laterite for use as flexible pavement material" *J. Mater. Civ. Eng.*, pp. 146–152 (2011)
5. Li, L., Benson, C. H., Edil, T. B., Hatipoglu, B., and Tastan, O. (2007). "Evaluation of recycled asphalt pavement material stabilized with fly ash." *In Proc., GeoDenver*. 1–10. Reston, VA: ASCE.
6. Li, X., and Dong, M. (2011). "Experimental Research on Pavement Performance of Cement-Stabilized Base Recycled Mixture.", *Applied Mechanics and Materials Vols. 94(96)*: 31-37.
7. Mohamadina, A., Arulrajah, A., Sanjayan, J., Disfani, M. M., Bo, M. W., and Darmawan, S. (2016). "Stabilization of demolition materials for pavement base/subbase applications using fly-ash and slag geopolymers: laboratory investigation." *J Mater Civ Eng.* 28(7): 04016033. [https://doi.org/10.1061/\(ASCE\)MT.1943-5533.0001526](https://doi.org/10.1061/(ASCE)MT.1943-5533.0001526).
8. Pai, R. R., Bakare, M. D., Patel, S., and Shahu, J. T. (2021a). "Structural evaluation of flexible pavement with steel slag-fly ash-lime in base layer," *J. Mater. Civ. Eng.* 33(6): 04021097. [https://doi.org/10.1061/\(ASCE\)MT.1943-5533.0003711](https://doi.org/10.1061/(ASCE)MT.1943-5533.0003711).
9. Pai, R. R., Bakare, M. D., Patel, S. and Shahu, J. T. (2022). "Asserting the applicability of copper slag and fly ash as cemented base materials in flexible pavement from a full-scale field study." *Journal of Materials in Civil Engineering*, 10.1061/(ASCE)MT.1943-5533.0004123.
10. Yeo, R., Vuong, B., and Alderson, A. (2002). "Towards National Test Methods for Stiffness and Fatigue Characterisation of Stabilised Materials, Report RC2028-002 for Austroads." ARRB Transport Research.
11. Zhang, P., Li, Q.F., and Huang, C.K. (2009). "Grey relational analyzing anti-cracking performance of semirigid base courses." *Journal of Grey System.* 18(4): 355-364.

Declaration

Certified that the details furnished above are correct to the best of my knowledge and belief and that the amount of financial assistance, if granted, will be utilized for the purpose for which it is granted within the time prescribed by APJAKTU. I also undertake to abide by the rules and other conditions prescribed by the grantee.

Rahul R. Pai
Name and Signature
of the Investigator



Name and Signature of
Head of the Institution

Place: Karukutty

Date: 28.04.2022

APJ ABDUL KALAM TECHNOLOGICAL UNIVERSITY
CENTRE FOR ENGINEERING RESEARCH AND DEVELOPMENT

College of Engineering Trivandrum Campus
Thiruvananthapuram. Pin 695 016

Application format for Research Seed Money

1. Title of the Research Proposal:

Study of dispersion coefficient of contaminants through different types of soils and remediation using natural fibres

2. Name & address & experience of Investigator

Dr. Praseeja A V
Assistant Professor
SCMS School of Engineering and Technology
Karukutty, Ernakulam
praseeja@scmsgroup.org, 8592089108

3. Teaching experience - 7 years

4. Objectives

1. To develop an experimental laboratory model for analyzing the contaminant transport mechanism through different types of soils.
2. To determine the dispersion coefficient of different contaminants through various soil types.
3. To analyse the effectiveness of natural fibres for controlling the distribution of contaminants in saturated soils.

5. Broad Subject area / field of classification

Environmental Engineering/Groundwater contamination

6. Project Type(s) (Basic Research / Applied Research / Developmental / Demonstration / Others)

Applied research

7. Abstract : Recent industrial and social developments in our country created a huge pollution problem in various components of the environment. The air pollutants, water pollutants, solid and hazardous waste will finally reach the soil and penetrate to the ground water. To study the

movement of these pollutants through the soil in dry, partially saturated and fully saturated conditions, an experimental model has to be developed. This study includes the design and analysis of a laboratory scale experiment set up to find the contaminant transport mechanisms and corresponding coefficients, when various contaminants are transported through different types of soils. Also includes the analysis of capacity of natural fibres to control the groundwater pollution.

8. Scientific scope of the Research proposal

Ground water protection is now receiving increasing attention in industrialized countries as the value of the resource is becoming better understood. Scientific studies should be performed and technical efforts should be given to identify proper remedial measures and thereby, improve the quality of groundwater systems. Field investigations, that are usually performed to assess these parameters, are very expensive and time-consuming. Besides, the success of remedial design depends on the ability to predict the subsurface distribution of the contaminants and its transfer of phases. Hence it is necessary to develop an experimental setup for analysing the transport mechanism of different contaminants in both longitudinal and lateral direction through various types of soil to identify a better solution to protect groundwater.

9. Applications / Socio-economic importance

The physical outcome of this study is to quantitatively estimate the transport parameter of contaminant through soil, especially the dispersivity and distribution coefficient. The identification of transport parameters helps to find an appropriate remedial measure to reduce groundwater contamination. The socio-economic importance of this work is to recommend a sustainable measure to reduce the effect of groundwater contamination caused by the industrial dyes emitted from textile industries.

As the controlling or remediating strategies are applied to the natural formations, these should essentially be environmental friendly and sustainable. Moreover, these adopted measures should be implemented easily without much investment. Hence, these factors turn the focus eventually to natural materials which can control/ remediate transport of contaminants through soil. From literatures, many natural fibres are found to be least expensive and good in sorption of various contaminants, biodegradable and can be used as remedial measure to reduce groundwater contamination. Hence it is proposed to identify a natural fibre, if found suitable based on current investigation, can be recommended as an environmental friendly solution to control the migration of dyes from a contaminated site. If found suitable, it will become a viable solution for controlling the migration of dye so that it will not reach the groundwater sources.

10. Scientific background of the project

Groundwater contamination occurs when man-made products or chemicals get into the groundwater and become unsafe and unfit for human use. Materials from the ground surface can

move through the soil and end up in the groundwater. During their downward transport through road materials and soils, contaminants in the aqueous phase interact with the solid phase. Since the groundwater migrates from areas of higher hydraulic head toward lower hydraulic head, transporting dissolved solutes through the combined processes of advection and dispersion. The advective transport of a component is carried by flow of a fluid, and diffusive and dispersive flux is contributed by molecular diffusion and mechanical dispersion.

A general form of mass transport in one dimension can then be described as:

$$\frac{\partial(\theta C)}{\partial t} = \frac{\partial}{\partial z} \left[(\theta D) \frac{\partial C}{\partial z} \right] - q C \quad (1)$$

where D_d is the diffusion coefficient of a porous medium. where $J = \theta C$ is mass flux, C is contaminant concentration, and q is the volumetric darcian flux of water. Equation 1 describes the processes of advection, diffusion, and mechanical dispersion. This equation can be further generalized to incorporate terms for chemical reactions and sorption effects.

a) Importance of the problem

Water is an essential resource for the existence of life and a major concern for sustainable development. The textile industry is one of the anthropogenic activities that pollute soil and water bodies. Therefore, the present work aims to undertake an experimental study to understand the transport behaviour of dyes through subsurface soil and eventually reaches groundwater. The textile dyes significantly compromise the water quality and imparts many environmental issues. Hence it is essential to understand the transport mechanism of dye through the soil in order to properly remediate without reaching the groundwater.

b) Related work already performed or in progress at your organization or in the state.

Water quality analysis works were carried out in the Water institute in our institution. The work was extended to both UG and PG projects in which numerical modelling studies were conducted to simulate the transport mechanism of various contaminants through soil. The main limitation behind the numerical modelling studies was the assumption of values in the transport mechanism of contaminants, especially the dispersion and diffusion coefficients. Hence to overcome those drawbacks, it is essential to develop an experiment setup for determining values of important factors contributing to the transport process of contaminants through soil.

c) Related work already performed or in progress at other places in India or abroad.

1. Literatures based on laboratory simulation of contaminants through soil

Kechavarzi et al. (2008) carried out experiments to investigate the effect of macro-heterogeneity on LNAPL flow and distribution in the unsaturated zone by simulating LNAPL spills in layered

soil systems consisting of sands with various textures. It reveals the importance of the initial water pressure and saturation distribution in unsaturated layered soil formations for the correct prediction of LNAPL infiltration and drainage.

Li et al. (2009) investigated the effect of column lengths on retardation factor both experimentally and numerically for caesium transport in crushed granite. This study examined the validity of break through curves from packed granite columns with different lengths and flow rates. Results shows that in order to reduce the influence of structural dispersivity on the determination of retardation factors, the equivalent pore volume of column supporting materials should be smaller than those of packed porous medium.

Berlin et al. (2015) conducted flow-through experiment and developed a one dimensional numerical model to simulate the effect of volatilization, dissolution, adsorption and microbial degradation of benzene transport in an unsaturated subsurface system. The degradation effect of benzene is represented as a retardation factor in modelling. An equation has been developed for representing the decreasing concentration of dissolved oxygen due to the bacterial utilization for the contaminant degradation.

2.Literatures based on application of cellulose-based materials / Coir Geotextiles in various remediation techniques.

Praveen et al. (2008) presents a viable and cost - effective technology using coir geotextile, for the removal of organic matter from wastewater

Karan et al. (2011) reviews different oil spill clean-up methods over water bodies with special emphasis on the phenomenon of oil sorption, methods of oil spill cleanup, characteristics of oil sorbent materials, fluid flow through fibrous materials, types of fibre materials for making sorbents and test methods for oil sorbents. It is suggested to concert efforts to structure suitable fibre assemblies for their use as environment-friendly oil sorbents

Mukulath and Thampi (2012) has conducted a pilot plant study by utilizing coir geotextile media of both woven and non-woven type as attachment media for the biofilters for low volume organic rich industrial wastewater. It is observed that non woven geotextile is better for removing nitrate and phosphate from sample waste water.

11. Details of any preliminary work done by the investigator

Laboratory studies for understanding the saturation distribution of hydrocarbons through various soil medium was conducted by the principal investigator (**Praseeja and Sajikumar, 2020**). The work highlighted an experimental study using Coir Geotextile (CG) layer (natural fibre) to control the migration of LNAPL in the unsaturated zone and highlighted the effective application of CG layer in the case of laterite soils than sandy soils. The experiment was conducted in a flow cell of

length 1.20m, height 1.20m and 0.10m depth was filled with soil up to a height of 1.10m from the bottom of the tank. Here diesel is taken as the LNAPL to simulate its flow behaviour. Twenty different trials of experiments were conducted for assessing the effectiveness of natural fibre (coir geotextile - CG) in controlling the NAPL migration through different types of soils, in both dry and wet conditions. The images of each trial were captured and the LNAPL saturation was analysed using the image analysis technique (IAT).

The data obtained from laboratory simulation includes (i) the LNAPL migration (in-transfer) rate, (ii) the initial saturation value (iii) LNAPL saturation as it migrates through the soil in time intervals until the migration stops, (iv) the pressure values before and during the spill, (v) the control action of the CG layer under various soil conditions. Based on these outcomes, the actual period of containment of LNAPL in the real field case is to be investigated numerically (Praseeja and Sajikumar, 2021). For numerically modelling the migration of a multiphase liquid in the unsaturated zone, it was necessary to study the transport mechanisms and the interactions between different phases (air, water, oil) within the zone through laboratory flow-through experiment.

Principal Investigator has worked on the application of natural fibres to improve the water quality parameters (Praseeja et al. 2022). The specific objectives of this study includes the water quality analysis of Periyar river due to the Kerala Floods 2018 and its remediation using natural fibre.


12. Detailed year wise work plan (Indicate methods / Techniques to be used)

Activity	0-3	3-6	6-9	9-12	12-15	15-18	18-21	21-24
Purchasing and assembling of equipments								
Soil testing								
Calibration of the setup								
Conduct of experiment								
Water sample analysis								
Result analysis								
Journal paper submission								
Report Preparation								

13. Particulars of equipment required

Sl. No	Required equipments	Specifications	No. of units
1	Batch Column setup	Material- plexi glass (for measuring both longitudinal and transverse dispersivity)	2
2	Overhead Tank	continuous storage of water for both vertical and horizontal setup (10 litres)	1
3	Peristaltic Pump	continuous supply of water (flow rate 0.002 -50ml/min)	2
4	Flow meter	Measuring flow rate	2
5	Flow control valves	To control flow	12
6	Chemical Reagents	Water quality analysis	

The proposed experimental set up to analyse the contaminant transport is given below.

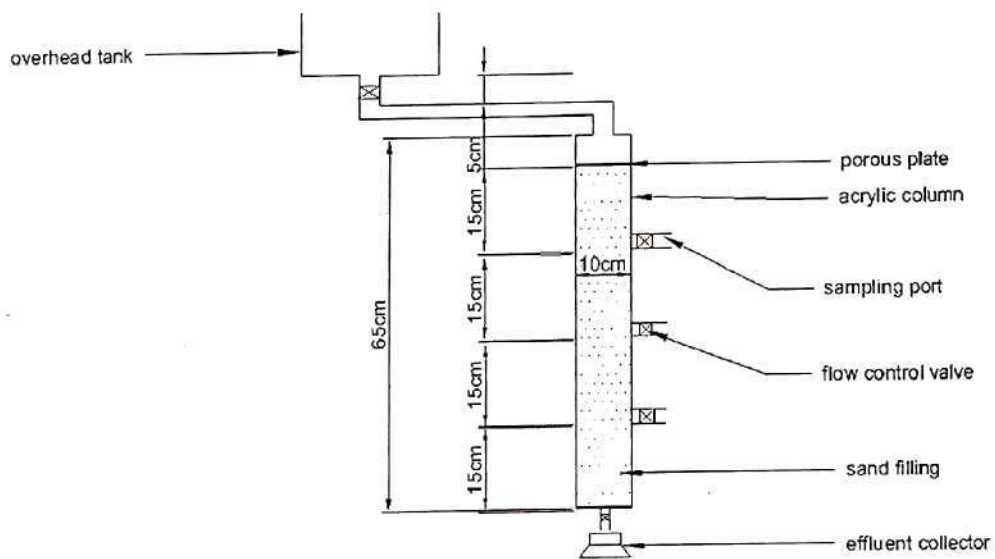

14. Particulars of any other facilities required Nil

15. Particulars of the facilities that will be provided by the institution where this project will be Implemented

Sl No	Infrastructural Facility	Yes/No/ Not Required/ Full or Sharing Basis
1	Environmental Engg. Lab facility to analyse water samples	Yes
2	Geotechnical Engg. Lab facility for analysing the soil properties	Yes
3	Water and electricity	Yes
4	Power generator	Yes
5	Telecommunication including email	Yes
6	Administrative support	Yes
7	Information facilities like internet and library	Yes
8	Transportation	No

16. Whether the project was submitted to any other organization for financial support: No

17. Budget Details: Estimated expenditure

SI No	Items	Amount (Rs)			Justification
		1 st year	2 nd year	Total	
1	Consumables	15000	15000	30000.00	Chemical reagents for water quality analysis
2	Equipment 1.Batch Column setup 2.Overhead Tank 3.Peristaltic Pump 4.Flow meter 5.Flow control valves	100000		1,00,000.00	Two flow setup –for measuring longitudinal and transverse dispersivity
3	Travel	5000	5000	10000.00	For sample collection and water sampling
4	Contingency	7500	7500	15000.00	Few water sampling tests to be done in external labs
	Total			1,55,000.00	

18. The sources of funding the project including funds from other agencies from which financial assistance is obtained/expected to be obtained, and the quantum of assistance from each agency :

Nil

19. Quantum and nature of assistance expected from the CERD KTU: Full financial Support

20. Name and address of the authority of Institution authorized to receive the grant

**SCMS School of Engineering and Technology, Vidya Nagar, Palissery, Karukutty,
Kerala 683582**

21. Whether grant under this scheme had been availed earlier by the investigator: No

22. Details of projects already undertaken by the Principal Investigator with any other funding

Agency: Nil

References

1. Berlin, M., Vasudevan, M., Kumar, G.S. and Nambi, I.M., 2015. Numerical modelling on fate and transport of petroleum hydrocarbons in an unsaturated subsurface system for varying source scenario. *Journal of Earth System Science*,124(3),pp.655-674
2. Karan, C.P., Rengasamy, R.S. and Das, D., 2011. Oil spill cleanup by structured fibre assembly. *Indian Journal of Fibre & Textile Research*,36(2), pp.190-200
3. Kechavarzi, C., Soga, K., Illangasekare, T. and Nikolopoulos, P., 2008. Laboratory study of immiscible contaminant flow in unsaturated layered sands. *Vadose Zone Journal*,7(1), pp.1-9
4. Li, M.H., Wang, T.H. and Teng, S.P., 2009. Experimental and numerical investigations of effect of column length on retardation factor determination: a case study of cesium transport in crushed granite. *Journal of hazardous materials*, 162(1),pp.530-535
5. Mukkulath, G. and Thampi, S.G., 2012. Performance of coir geotextiles as attached media in biofilters for nutrient removal. *International Journal of Environmental Sciences*,3(2), pp.784-794
6. Praseeja, A.V. and Sajikumar, N., (2020). LNAPL Migration in Vadoze Zone and Its Prevention Using Natural Fiber. *Journal of Natural Fibers*, pp.1-16.,ISSN / eISSN: 1544-0478 / 1544-046X
7. Praseeja, A.V. and Sajikumar, N., (2021) Numerical simulation on LNAPL migration in vadose zone and its prevention using natural fibre. *Experimental and Computational Multiphase Flow*, pp.1-14.
8. Praseeja, A. V., Lakshmi, S. A., Nasna, M., Radhu D., and Vishnuja, S. N., (2022) Impacts of Flood on Water Quality of Periyar River and Remediation Using Natural Fibers, *Journal of Natural Fibers*, <https://doi.org/10.1080/15440478.2022.2057382>
9. Praveen, A., Sreelakshmy, P.B. and Gopan, M., 2008. Coir geotextile-packed conduits for the removal of biodegradable matter from wastewater. *Current science*,95(5), pp.655-658.

Declaration

Certified that the details furnished above are correct to the best of my knowledge and belief and that the amount of financial assistance, if granted, will be utilised for the purpose for which it is granted within the time prescribed by CERD KTU. I also undertake to abide by the rules and other conditions prescribed by the grantee.

Job Praseed AV

Name and Signature
of the Investigator

[Signature]

Name and Signature of
Head of the Institution



(Office seal)

Place: Ernakulam

Date: 29/4/22

APJ ABDUL KALAM TECHNOLOGICAL UNIVERSITY

CENTRE FOR ENGINEERING RESEARCH AND DEVELOPMENT

College of Engineering Trivandrum Campus
Thiruvananthapuram Pin 695 016

Application for Research Seed Money

1. Title of the Research Proposal: Catchment scale source apportionment of sediment yield into Vembanad Lake

2. Name & address & experience : Merin Mathew,
of Investigator : Assistant Professor (KTU ID: KTU-F30130),
(Mobile No. and : Civil Engineering Department,
e-mail are mandatory) : SCMS School of Engineering and Technology,
: Vidya Nagar, Palissery, Karukutty,
: Ernakulam - 683576, Kerala.
: Experience: 6 Years, 2 months
: Mob No. 9847498570
: Email id: merinmathew@scmsgroup.org

3. Teaching experience: 6 Years, 2 months (Date of Joining: 01/03/2016)

4. Objectives of Research:

- i. Sampling and chemical characterization of suspended sediments flowing into the Vembanad Lake.
- ii. Sampling and chemical characterization of topsoil from potential source regions of suspended sediments in the catchment of Vembanad Lake.

5. Broad Subject area/ field of classification:

Water Resources Conservation and Management - Wetlands

6. Project Type(s) (Basic Research / Applied Research / Developmental / Demonstration

/Others: Applied Research

7. Abstract:

Kerala's largest wetland ecosystem, the Vembanad Lake, has been playing a significant role in the socio-economic and cultural history of Kerala. However environmental and ecological deterioration of this second largest Ramsar wetland in India, mostly due to anthropogenic interventions, has been a concern over the recent decades. Among several other factors, increased siltation is a major issue that needs to be addressed for the health and sustainability of Vembanad lake. Data from Central Water Commission (CWC) shows increased sediment load in the rivers draining into Vembanad lake {1} which is also corroborated by a recent study by KUFOS {2} that revealed progressive shallowing of backwater due to siltation in recent years. Though siltation is identified as a threat to the wetland, limited understanding is available on the potential sources/activities and geographic zones contributing to the sediment yield. Man-made alterations in the catchment such as deforestation, urbanization, agriculture, and mining and land cover modifications are some of the potential sources contributing to the sediment load into Vembanad. Quantification of the relative contribution from these different sources to in-stream sediment is of major interest to target sediment mitigation best management practices (BMPs) in the highlands. The present research proposal aims at using a sediment fingerprinting technique {3,4,5,6} to provide information on the sources of suspended sediment in the Vembanad lake catchment. This technique is based on two major assumptions: first, potential sources of suspended sediment are distinguishable on the basis of selected geochemical element fingerprinting properties, and second, the relative source contributions of different sources to suspended sediment can be determined with the comparison of fingerprinting properties in the suspended sediment and the source material samples. The procedure will employ multivariate statistical techniques to compare the fingerprint properties in suspended sediment and potential sources of sediment to obtain quantitative information on relative contributions from different sources. The proposed study will focus on one major river draining into the main body of Vembanad Lake namely, Muvattupuzha River. Identification of potential sediment source regions and analysis of land-use land cover characteristics within the catchment of these rivers will be carried out using satellite remote sensing data. Time integrated suspended sediment sampling will be carried out in the mentioned rivers and complete characterization of suspended sediments will include its size distribution as well as chemical composition. Representative source samples will be collected as surface scraps from different sub-catchment areas susceptible to the mobilization of sediment by water erosion. Source apportionment of suspended sediments will then be carried out using a multivariate mixing model {7,8}. This will help to effectively implement

best management practices within the Vembanad watershed to control sediment erosion and siltation of Vembanad Lake.

8. Scientific scope of the Research proposal:

Siltation of the Vembanad wetland can result in the reduction of its carrying capacity and heavy biodiversity losses, consequently impacting the communities settled around the environs. The economic activities carried out in and around the backwater include fishing, shrimp farming, clam picking, rice cultivation, duck rearing, and backwater tourism and any degradation of this wetland system will be devastating in the socioeconomic perspective of Kerala. Though high sediment yield has been monitored in many recent studies and the impact of siltation is understood, the understanding is limited on the sources yielding sediments into the lake. Unless the source regions are identified and their sediment yield is accurately estimated, it is not possible to implement any mitigation measures. The research proposed here will be the first attempt in the state to scientifically estimate the nature of suspended sediments flowing into Vembanad and apportion the sources contributing to it. The successful completion of this study, which is based on Muvattupuzha River basin will be helpful to replicate in other four major rivers draining into the main body of Vembanad Lake namely, Achenkovil River, Manimala River, Meenachil River, and Pampa River.

9. Applications / Socioeconomic importance / Relevance, if any, for the utilization and management of the natural resources of the State):

Understanding the sources and estimating their respective contribution toward suspended sediment yield into Vembanad Lake is essential for devising best management practices for controlling and mitigating of siltation of the wetland. The findings from this project will help in conserving Vembanad Lake and protecting the livelihood and sustainability of communities dependent on it. By conducting this study, the following sectors will be benefited:

- 1) Kerala Water Authority- Heavy sediment yield is a major issue in treating water at KWA treatment plants in the mentioned rivers. Reduction in the suspended sediments will be therefore beneficial for KWA.
- 2) Inland fisheries- Increased siltation and shrinking of Vembanad impose stress on the fish resource thereby affecting the community dependent on fisheries. This proposal, therefore, is also beneficial to prevent future damage to the fisheries sector.

3) Backwater Tourism - Backwater tourism is a major revenue for Kerala. The sustainability of this sector depends on managing the siltation of the lake.

4) Urban local bodies around Vembanad- Reduction in the water holding capacity of Vembanad Lake due to siltation can induce flooding in the neighboring urban areas. Mitigation of increased sediment yield from the catchment is therefore beneficial for urban local bodies to avoid such scenarios.

10. Scientific background of the project

a) Importance of the problem

Vembanad-Kol wetland is a multi-functional ecosystem supporting rich biodiversity as well as the livelihoods of dependent communities. It is the lifeline for 1.6 million people and a variety of flora and fauna and constitutes the second largest wetland system in India. Recent studies have indicated shallowing and shrinkage of Vembanad lake with one of the major reasons being the siltation induced by high sediment yield from the catchment area. If this continues, in addition to the ecological and socio-economic impacts, the lake will have reduced water holding capacity which increases the flooding potential of neighboring settlements. As climate change impacts such as extreme rainfall events and sea-level rise are becoming real for Kerala along with unregulated land-use alterations and excessive erosion in the highlands, the future of Vembanad Lake will definitely depend on better management practices (BMPs) in its catchment. The proposed project, therefore, is of high importance as it will support the development of policies and define BMPs for the health and sustainability of Vembanad Lake.

b) Related work already performed or in progress at your organization or in the state.

A study conducted by KUFOS finds that there is sharp depth shrinkage for the lake from 8 to 9 meters depth in the 1930s to the present 1.6 to 4.5 meters depths. They also states that the southern part of the lake is likely to disappear in one or two decades [2]. This finding is also supported by the study conducted by NCESS and MoES on 2016; the estuarine area has a shrinkage of 12.28 km² (6.93%) during 1973 to 2015 time period [9].

In 2011 a study was conducted in the surface sediments of Vembanad Lake by Institute for Ocean Management, Anna University; they have collected sediment samples from 47 stations in the lake and examined the organic carbon, sediment texture and heavy metal content like Al, Fe, Mn, Cr, Zn, Ni, Pb, Cu, Co and Cd. The results of the study has shown that the sediment was heavily polluted in northern arm and moderately polluted in the extreme end

and port region of the southern arm of the lake. Also the statistical analysis shown a significant spatial variation for all sediments but only negligible seasonal variation [10].

c) Related work already performed or in progress at other places in India or abroad.

Several studies has been conducted in the field of sediment source apportionment, at various parts of the world. Sediment fingerprinting techniques will help to acquire valuable information on the sources of suspended sediment, which helps in adopting integrated management plan. Sediment fingerprinting study conducted in Pleasant Valley watershed in South Central Wisconsin in 2014 revealed that agriculture and stream banks are important sources of suspended sediment (45 to 97%) [3].

Using traditional methods it is difficult to identify the source of sediments in water bodies but sediment source fingerprinting or tracing procedures was a better alternative for this problem. The increase in fine grained sediment flux is creating a lot of ecological issues which extends up to a threat of extinction of water bodies itself. A review paper on sediment source fingerprinting as an aid to catchment management [4] explains several aspects of fingerprinting techniques like sediment source classification catchment source and target sediment sampling, tracer selection, grain size issues, tracer conservatism, source apportionment modelling, and assessment of source predictions using artificial mixtures.

A modified sediment fingerprinting study was conducted in Somerset Levels in England during 2009 [5], they incorporated a modified mass balance model by Monte Carlo approach for representing the uncertainty in surrounding source and sediment sampling, also weightings has given to account the source variability and discriminatory power of individual tracer properties and prior information. The sensitivity tests conducted by them confirmed that the precision of source apportionment was improved by incorporating this weightings and prior information into the mixing model.

In the eastern part of Alabama, USA a source apportionment study was conducted during 2018 [6] to find the relative contribution from different sources of suspended sediment in an urbanized watershed. By analysing the sediment samples from river and top soil from various parts of the catchment, they have determined that the construction sites were the dominant sources of suspended sediment in the watershed. They suggested that both spatial and temporal variability in suspended sediment sources has to be considered while developing sediment control management strategies.


Since fine grained sediment are the key component in geochemical flux, to collect these suspended sediment samples a time integrated sampling methodology was followed by Phillips et. al, 2000 [7]. They are using a simple sediment sampler, utilizing ambient flow to induce sedimentation by settling. This sampler can be installed in small streams in unattended conditions and can collect time-integrated suspended sediment samples. The sampler will collect a maximum of 71% of the input sample mass. The field trials with this equipment has showed that the particle size composition and total carbon content of the sediment collected by the sampler were representative statistically of the ambient suspended sediment. A review paper on the suspended sediment sampling methods [8] the author has highlighted the advantages of time integrated sediment sampler.

➤ **Summary of literature review**

Vembanad-Kol wetlands are under the threat of getting extinct within two decades and one of the major reason for this is the sediment deposit. Even though there are so many management practices are adopted at the catchment area of Vembanad Lake, they are not considering this sediment load. So for implementing a best management practice (BMP) the real contributor of sediment has to be identified. Heavy metal analysis and species extension studies are taking place, but a sediment fingerprinting study is lacking; by conducting this study this gaps can be rectified.

11. Details of any preliminary work done by the investigator: Nil

12. Detailed year-wise work plan (Indicate methods / Techniques to be used):

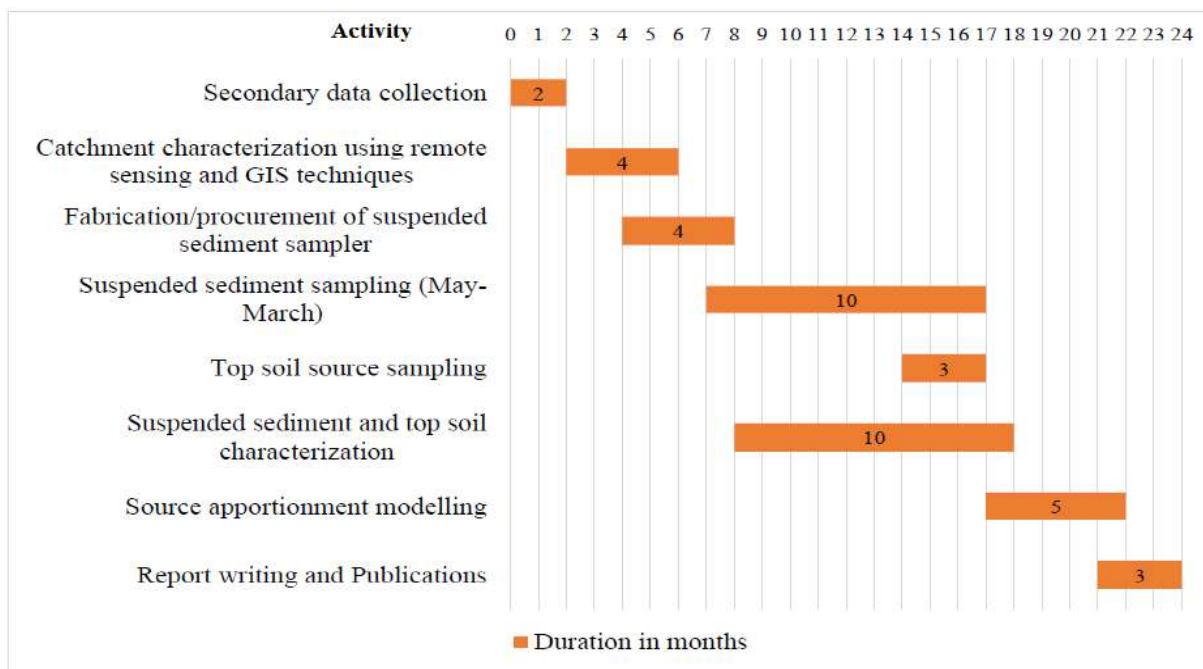

Methodology:

I) Suspended sediment sampling and chemical characterization: suspended sediments will be collected from 2 sites (the point where river joining the Vembanad lake) using the time-integrated suspended sediment sampler developed by Phillips et al. {7} for ten months (May to March). The suspended sediment collected will be oven-dried and sieved into two particle sizes of range 63-212 micrometer (fine sand) and <63 micrometers (silt and clay). Then particle size analysis will be carried out using hydrometer and pipette, and chemical characterization for geochemical elements (selection of geochemical elements will be decided based on the source) using inductively coupled plasma mass spectrometry (ICP-MS).

II) Catchment characterization through satellite data analysis: The physical characteristics like catchment geometry, slope, aspect, change in land use/land cover and geomorphological properties of the catchment of one major river (Muvattupuzha River) draining into Vembanad lake will be studied using Remote sensing (Landsat TM) and Geographic Information System (GIS) techniques. Based on the land use pattern various source areas will be identified and the topsoil sampling points for each source area in each catchment will be fixed.

III) Topsoil sampling and chemical characterization: The topsoil (0 - 2.5 cm) {3} samples will be collected from each source area in each catchment. Similar to the suspended sediment; the topsoil collected from each source will be oven-dried and sieved into two particle sizes of range 63-212 micrometer (fine sand) and <63 micrometers (silt and clay). Then particle size analysis will be carried out using hydrometer and pipette, and chemical characterization for geochemical elements (selection of geochemical elements will be decided based on the source) using inductively coupled plasma mass spectrometry (ICP-MS).

13. Particulars of equipment required:

Sl. No.	Equipment Name	For which purpose it would be utilized in current project	Source of equipment
1	Time-integrated suspended sediment sampler	Suspended sediment sampling	To be fabricated in the institution
2	Spade	Topsoil sampling	Available at the institution
3	Drying oven	Suspended sediment and topsoil drying	Available at the institution

4	Sieve analysis equipment, hydrometer and pipette	Particle size analysis	Available at the institution
5	Inductively coupled plasma mass spectrometry (ICP-MS)	Chemical characterization of suspended sediment and topsoil	Available at Sophisticated Test and Instrumentation Center (STIC)

14. Particulars of any other facilities required: Nil

15. Particulars of the facilities that will be provided by the institution where this project will be implemented:

Sl. No.	Infrastructural Facility	Yes/No/ Not Required/ Full or Sharing Basis
1.	Workshop facility	Yes
2.	Water & Electricity	Yes
3.	Power Generator	Yes
4.	AC Room or AC	Yes
5.	Telecommunication including e-mail & Fax	Yes
6.	Transportation	No
7.	Administrative/ Secretarial Support	Yes
8.	Information facilities like Internet/ Library	Yes
9.	Computational facilities	Yes
10.	Laboratory Space /Furniture	Yes
11.	Laboratory facilities	Yes
12.	Any other special facility being provided	Fabrication facility

16. Whether the project was submitted to any other organization for financial support:

Nil

17. Budget Details: Estimated expenditure: Rs. 2,03,480/-

Sl. No.	Items	Amount (Rs)
1	Consumables (Do not exceed 20% of the total amount)	40,000/-
2	Equipment (Sample analysis cost) (For Private self-financing Colleges, 50% of the actual Equipment cost subject to the maximum of sanctioned amount shall be borne by the college)	1,23,480
3	Travel (Do not exceed 10% of the total amount)	20,000/-
4	Contingency (Do not exceed 10% of the total amount)	20,000/-
	Total	2,03,480/-

Budget details:

Sl. No.	Item	Rate (Rs.)	Amount (Rs.)			Justification
			1 st year	2 nd year	Total	
1	Consumables					
	Fabrication materials	Rs. 10,000/- per sampler	20,000		20,000	<ul style="list-style-type: none"> Time-integrated suspended sediment sampler
	Sampling labour charges		10,000	5,000	15,000	<ul style="list-style-type: none"> Sampler installation and recollection from sampling points
	Stationery items		5000		5000	<ul style="list-style-type: none"> Printing, Photostat, Sample collection bags
2	Equipment (Sample Analysis Cost)					
	Chemical characterization of suspended sediment and topsoil using ICP-MS	Rs. 708/- for initial element and Rs. 142/- for subsequent elements		1,23,480	1,23,480	<ul style="list-style-type: none"> Top soil sample from various locations. Suspended sediment sample from 2 locations during 10 months (25 elements)
3	Travel		5,000	15,000	20,000	<ul style="list-style-type: none"> Travel along the study area several times for data collection and sampling
4	Contingency		5,000	15,000	20,000	<ul style="list-style-type: none"> Expecting damages or missing of the suspended sediment sampler due to scoring action in river
	TOTAL		45,000	158,480	203,480	

18. The sources of funding the project including funds from other agencies from which financial assistance is obtained/expected to be obtained, and the quantum of assistance from each agency: Nil

19. Quantum and nature of assistance expected from the APJAKTU: Full financial support

20. Name and address of the authority of Institution authorized to receive the grant:

SCMS School of Engineering and Technology, Vidya Nagar, Palissery, Karukutty, Ernakulam - 683576, Kerala.

21. Whether grant under this scheme had been availed earlier by the investigator: (If so, provide details): No

22. Details of projects already undertaken by the Principal Investigator with any other funding agency: Nil

➤ **References:**

[1] Cwc.gov.in. 2018. HYDROLOGICAL DATA (UNCLASSIFIED) BOOK. [Online] Available at: <<http://www.cwc.gov.in/sites/default/files/ihd2018.pdf>> [Accessed 28 October 2021].

[2] Kufos.ac.in. 2019. Vibrant-Vembanad-Report_compressed.pdf. [Online] Available at: <http://kufos.ac.in/wp-content/uploads/2021/01/Vibrant-Vembanad-Report_compressed.pdf> [Accessed 28 October 2021].

[3] Lamba, J., Karthikeyan, K. G., & Thompson, A. M. (2015). Apportionment of suspended sediment sources in an agricultural watershed using sediment fingerprinting. *Geoderma*, 239-240, 25–33. <https://doi.org/10.1016/j.geoderma.2014.09.024>

[4] Collins, A., Pulley, S., Foster, I., Gellis, A., Porto, P., & Horowitz, A. (2017). Sediment source fingerprinting as an aid to catchment management: A review of the current state of knowledge and a methodological decision-tree for end-users. *Journal of Environmental Management*, 194, 86-108. doi:10.1016/j.jenvman.2016.09.075


[5] Collins, A., Walling, D., Webb, L., & King, P. (2010). Apportioning catchment scale sediment sources using a modified composite fingerprinting technique incorporating property weightings and prior information. *Geoderma*, 155(3-4), 249-261. doi:10.1016/j.geoderma.2009.12.008

[6] Malhotra, K., Lamba, J., Srivastava, P., & Shepherd, S. (2018). Fingerprinting Suspended Sediment Sources in an Urbanized Watershed. *Water*, 10(11), 1573. doi:10.3390/w10111573

- [7] Phillips, J.M., Russell, M.A., Walling, D.E., 2000. Time-integrated sampling of fluvial suspended sediment: a simple methodology for small catchments. Hydrol. Process. 14 (14), 2589–2602.
- [8] Perks, M. T. 2014. “Suspended sediment sampling.” In Geomorphological techniques, edited by L. E. Clarke. London: British Society for Geomorphology
- [9] Nair K. N, Babu D. S. S. (2016). “Spatial Shrinkage of Vembanad Lake, South West India during 1973-2015 using NDWI and MNDWI.” International Journal of Science and Research, 5(7), ISSN (Online): 2319-7064; 1394-1401
- [10] Selvam, A. P., Priya, S. L., Banerjee, K., Hariharan, G., Purvaja, R., & Ramesh, R. (2011). ‘Heavy Metal Assessment using geochemical and statistical tools in the surface sediments of Vembanad lake, southwest coast of India.’ Environmental Monitoring and Assessment, 184(10), 5899–5915. <https://doi.org/10.1007/s10661-011-2389-8>

Declaration

Certified that the details furnished above are correct to the best of my knowledge and belief and that the amount of financial assistance if granted, will be utilised for the purpose for which it is granted within the time prescribed by APJAKTU. I also undertake to abide by the rules and other conditions prescribed by the grantee.


 Merin Mathew
 Name and Signature
 of the Investigator


 Name and Signature of
 Head of Institution
 PRINCE J.
 PRINCIPAL
 SCMS SCHOOL OF ENGINEERING & TECHNOLOGY



Place: Karukutty

Date: 30/04/2022

APJ ABDUL KALAM TECHNOLOGICAL UNIVERSITY

College of Engineering Trivandrum Campus, Thiruvananthapuram. Pin 695 016

Application format for Research Seed Money

1. Title of the Research Proposal:

Sea water intrusion modelling into some of the coastal aquifers in Thrissur district.

2. Name & address & experience of Investigator: Meera Varghese

(Mobile No. and e-mail are mandatory)

Assistant Professor

Department of Civil Engineering

SCMS School of Engineering and

Technology, Karukutty

meeravarghese@scmsgroup.org

7306254267

3. Teaching experience

: 2 years 9 months

4. Objectives of Research :

- i) To analyse the water quality data obtained from selected wells along coastal areas of Thrissur district
- i) To develop a flow and transport model on sea water intrusion in the selected study area
- iii) To predict the extent of sea water intrusion after a period of 50 years
- iv) To understand the effect of pumping on sea water intrusion

5. Broad Subject area / field of classification: Groundwater hydrology (Environmental Engineering)

6. Project Type(s) (Basic Research / Applied Research / Developmental / Demonstration / Others:

Applied Research

7. Abstract:

The existence of seawater intrusion severely limits the development and management of fresh groundwater resources in coastal aquifers. Underutilization of the existing groundwater resource means that important fresh water is lost as it flows naturally to the sea on the other hand and incase of overutilization of resources leads to water table depletion. Many models have been created over the years to illustrate and analyses the problems of seawater intrusion. They might be as simple as analytical solutions or as complicated as numerical models. Thrissur is experiencing a number of environmental issues as a result of population growth, rapid urbanization, and land reforms, including flooding, groundwater pollution from industrial effluent discharge, and seawater intrusion, etc. There is an immediate need to investigate the causes of seawater intrusion and possible solutions. This research aims at the simulation of seawater intrusion in some of the coastal areas of Thrissur district through Finite element flow and mass transport (FEFLOW) model and examines the impact of increased pumping scenarios on extent of seawater intrusion

8. Scientific scope of the Research proposal:

Seawater intrusion is a major hydrological problem in many coastal regions all around the world. It is usually defined as the intrusion of sea water into fresh groundwater areas in coastal aquifer locations. This phenomenon will occur when the natural equilibrium state established between fresh- and seawater is disturbed as a result of natural or artificial effects, which in turn results in the deterioration of freshwater resources affecting human beings, animals and agriculture and industrial resources within the contaminated zones. Over exploitation of coastal aquifer disturbs the natural steady state established between fresh- and saltwater. When the freshwater level is drawn down due to excessive pumping, the freshwater and seawater boundary moves towards inland with the subsequent salinization of areas previously located within the freshwater zone. Seawater intrusion is characterized by its invisibility, frequent dynamic changes, harmful effects, hard or even impossible reversibility and challenging management.

9. Applications / Socioeconomic importance / Relevance, if any, for the utilization and management of the natural resources of the State):

As of 2011 India census, Thrissur city had a population of 315,957. Acute water scarcity being faced in the hilly areas in summer period due to drying up of dug wells and hand pumps. Dug wells in midland region get dried up if monsoon is delayed or if there are no summer showers. The increased dependence on bore wells in midland areas leads to drying up of dug wells in lateritic mounds and slopes, which affects the drinking water needs of those areas. In certain coastal areas, the salinity has been observed more during high tides and less during low tides and increasing from February to May. In the present research the focus is to study the extent of sea water intrusion in coastal areas of Thrissur district and predict whether it will affect the water security of the study area in near future.

10. Scientific background of the project

a) Importance of the problem

Clean drinking water is one among the basic necessities of all human beings. Saline water intrusion into house hold wells is an emerging problem in most of the coastal areas. People find it difficult to use salty water for their day today activities and hence sometimes the wells are discarded completely. Predicting salinity intrusion into coastal aquifers help the government agencies to take proper precautionary measures for saving the water bodies

b) Related work already performed or in progress at your organization or in the state.

Nil

c) Related work already performed or in progress at other places in India or abroad.

CP Kumar et al (2007) did modeling of a coastal aquifer in goa using FEFLOW. This work was done by groundwater hydrology division of National Institute of Hydrology. The objective of the study was to stimulate the sea water intrusion in the coastal regions of Goa and to evaluate the impact of further ground water development on seawater intrusion. Outcome of the study includes the

present status of seawater intrusion in the area, impact of ground water development on the extend of seawater intrusion. The methodology adopted for the study comprises of collection of meteorological, measurement of groundwater level in observation wells lithological, geochemical data measurements in observation wells, salinity measurement in observation wells, model conceptualization, calibration and simulation

Gaps identified;

From the literatures, it is observed that salt water intrusion modelling has not been done in Thrissur district. So this initiative will help to better manage the ground water resources of the study area

11. Details of any preliminary work done by the investigator

Site has been visited and 10 observation wells were finalized along the coastal areas. The water quality details for the past 10 years has been collected from Kerala Ground water Department

12. Detailed year-wise work plan (Indicate methods / Techniques to be used)

ACTIVITY	0-3	3-6	6-9	9-12	12-15	15-18	18-21	21-24
Data collection from Ground water Board								
Site visit								
Data preparation and model conceptualization								
Determination of boundary conditions and numerical modelling								
Data collection post Monsoon								
Calibration, prediction, simulation and conclusion								
Preparation of research paper								
Preparation of report								

Methodology

- Problem identification and selection of software
- Collection of relevant data Pre and Post monsoon period
- Analysis of collected data
- Model conceptualization and data preparation
- Determination of initial and final boundary conditions
- Modelling for a numerical solution using FEFLOW application

- Calibration of model • Predictive simulations
- Interpretations and conclusions

13. Particulars of equipment required

Sl. No	Equipment name	Purpose
1	Nil	

14. Particulars of any other facilities required

Facility required	Parameters	Purpose
Water testing	Coliform colonies	Bacteriological Analysis
	Fe	Water quality analysis
	Mg	Identification of salinity source
	Cl	Identification of salinity source

15. Particulars of the facilities that will be provided by the institution where this project will be implemented

Sl.No	Infrastructure facility	Yes/No
1	Workshop facility	Yes
2	Water & Electricity	Yes
3	Telecommunication including e-mail & Fax	Yes
4	Transportation	Yes
5	Information facilities like Internet/ Library	Yes
6	Laboratory Space /Furniture	Yes

16. Whether the project was submitted to any other organization for financial support: Nil

17. Budget Details: Estimated expenditure

	Items	Rate (Rs)	Amount (Rs)			Justification
			1 st year	2 nd year	Total	
1	Data collection Water quality and level data from Ground water Department		27500	27500	55000	
2	a. Equipment • Containers	50/container	1000		1000	• For water sampling
	b. Analysis of samples Coliform, Iron, Magnesium	1200/sample	12000	12000	24000	• For water Testing
3	Travel (Do not exceed 10% of the total amount)		7000	7000	14000	• For sample collection
4	Contingency (Do not exceed 10% of the total amount)		7000		7000	
	Total		54500	46500	101000	

18. The sources of funding the project including funds from other agencies from which financial assistance is obtained/expected to be obtained, and the quantum of assistance from each agency : Nil

19. Quantum and nature of assistance expected from the APJAKTU : Full financial support

20. Name and address of the authority of Institution authorized to receive the grant

SCMS SCHOOL OF ENGINEERING AND TECHNOLOGY
VIDYA NAGAR, PALLISSERY, KARUKUTTY
KERALA 683582

21. Whether grant under this scheme had been availed earlier by the investigator: (If so, provide details) : Nil

22. Details of projects already undertaken by the Principal Investigator with any other funding agency Nil

References

1. K.S Anil kumar and C.P. Priju(2015),Study on Saline Water intrusion into the Shallow Coastal Aquifers of Periyar River Basin, Kerala using Hydrochemical and Electrical Resistivity Methods, International conference journal on water resources and ocean engineering.
2. C.P Kumar(may 2016),Seawater intrusion in coastal aquifers, EPRA International Journal of Research and Development (IJRD),Volume :1,Issue :3
3. Fei Ding and Takao Yamashita(2014) ,Seawater modelling of coastal aquifer in the liao dong bay coastal plain, China, Journal of marine and technology,Vol:22.
4. Vanessa Rodriguez and Anibal perez(2018), Saline intrusion on coastal aquifer, Vol:2, Issue:5.

Declaration

Certified that the details furnished above are correct to the best of my knowledge and belief and that the amount of financial assistance, if granted, will be utilized for the purpose for which it is granted within the time prescribed by APJAKTU. I also undertake to abide by the rules and other conditions prescribed by the grantee.

MEERA VARGHESE 
Name and Signature
of the Investigator




Name and Signature of
Head of the Institution

Place: KARUKUTTY

Date: 29.4.2022

Phone No 04842439029

Customer

नाम 901093716 M/S CERD RSM KTU RESE
Name

खाता क्र.
A/c. no.

588802010008174 (SB GENERAL)

Cust Id : 901093716

Village : 627965 -Karukutty

MICR Code : 683026004

IFSC Code : UBIN0558885

बचत बैंक खाता
पास बुक

SAVINGS BANK
PASS BOOK

नामंकन सुविधा उपलब्ध
Nomination facility available

www.unionbankonline.co.in/

Missed Call Balance Mob No:09223008586

यूनियन बैंक ऑफ इंडिया  **Union Bank**
of India

भारत सरकार का उपक्रम A Government of India Undertaking



यूनियन बैंक ऑफ इंडिया  Union Bank
of India

एक संस्थापक संस्था A Government of India Undertaking



शाखा / Branch :

PALISSERY

Issue date:23-03-2023

शाखा का पता / Branch Address :

SCMS COLLEGE OF ENGG AND TECH

Sr No: 2

VIDYATA NAGAR, PALISSERY PALISSERY-683582

KERALA

INDIA

शाखा का फोन नं. / Branch Phone No.:

04842437029

IFSC Code : UBIN0558885

खाता क्र. / Account No.:

In the Name of :

नाम / Name

i)

588802010008174

ii)

(SB GENERAL)

iii)

M/S CERD RSM KTU RESEARCH 3 1082 2022 05

पेशा / Occupation

पता / Address

खाता खोलने की तारीख

ASST PROFESSOR DEPT OF CIVIL ENGG

SCMS SCHOOL OF ENGG AND TECH

Date of Opening A/c

KARUKUTTY

Pin : 683576 KERALA

INDIA

10-03-2023

नामांकन पंजीकृत / Nomination Registered: हाँ Y / नहीं N

लेखाकार Accountant

दिनांक Date	विवरण Particulars	सोल आयडी SOL ID	चेक नं. CHQ. No.	निकाली गयी राशि DEBIT	जमा की गयी राशि CREDIT	जमाकर्ता के खाते में शेष राशि BALANCE	लेखाकर आक्षर INITIAL
----------------	----------------------	--------------------------	------------------------	-----------------------------	------------------------------	---	-------------------------

18-11-2023 By NEFT:Director of Treasuries accou 47380

100000.00

100000.00 Cr

Please visit your branch to avail facility of Nomination in your accounts including locker, to avoid inconvenience to your legal heirs in settlement of claims after you. Nomination can be changed, modified, cancelled by you any time during your lifetime.

नवीनतम संशोधन / Latest Amendments

1. निष्क्रिय खाते के संबंध में / About Dormant Accounts

- लगातार 12 माह तक परिचालित न हुए बचत खाते को निष्क्रिय खाते रूप में वर्गीकृत कर दिया जायेगा. निष्क्रिय खाते में परिचालन की अनुमति नहीं होगी. खाते को सक्रिय कराने के लिये ग्राहक कृपया शाखा प्रबंधक से संपर्क करे तथा निष्क्रिय खाते को पुनः सक्रिय कराये बिना उस पर कोई चेक जारी न करें.
 - Saving Banks Accounts, which are inoperative for a continuous period of 12 months will be classified as Dormant. Operations will not be allowed in Dormant Account. Customers are requested to contact the Branch Manager for re-activating the account and are requested not to issue any cheques on Dormant Account before they are reactivated.
- ### 2. चेक पर परिवर्तन / अधिलेखन के संबंध में / About Alterations / Overwritings on cheques
- चेक पर कोई परिवर्तन / संशोधन न किया जाए. आदाता के नाम, रकम (पुनः वैधीकरण की दृष्टि से दिनांक में परिवर्तन को छोड़कर) आदि में परिवर्तन के लिये नया चेक प्रयोग करें.
 - No changes/corrections should be carried out on the cheques. For any change in the payee's name, the amount (other than date for validation purpose) etc, fresh cheque forms should be used.

यूनियन बैंक
एन सी एल सी
Union Bank
of India

A Government of India Undertaking



100% Public Corporation

शाखा / Branch : PALISSERY
SCMS COLLEGE OF ENGG AND TECH
शाखा का पता / Branch Address : P. NAGAR, PALISSERY PALISSERY-683582

शाखा का फोन नं. / Branch Phone No. : 04842439029

खाता क्र. / Account No. :

In the Name of :

नाम / Name i)

588802010008177

(SB GENERAL)

ii)

M/S CERD RSM KTU RESEARCH 3 1082 2022 06

iii)

पेशा / Occupation

पता / Address

खाता खोलने की तारीख

ASST PROF DEPT OF CIVIL ENGG
KARUKUTTY

SCMS SCHOOL OF ENGG AND TECH

Date of Opening A/c

10-03-2023

Pin : 683576 KERALA

INDIA

Issue date: 23-03-2023

Sr No: 1

KERALA

INDIA

IFSC Code : UBIN0558885

नामांकन पंजीकृत / Nomination Registered: हाँ Y / नहीं N

लेखाकार Accountant

दिनांक Date	विवरण Particulars	सोल आयडी SOL ID	चेक नं. CHQ. No.	निकाली गयी राशि DEBIT	जमा की गयी राशि CREDIT	जमाकर्ता के खाते में शेष राशि BALANCE	लेखाकर आधेश्वर INITIAL
----------------	----------------------	--------------------------	------------------------	-----------------------------	------------------------------	---	---------------------------

18-11-2023 By NEFT:Director of Treasuries accou 47380

127500.00

127500.00 Cr

दिनांक Date	विवरण Particulars	सोल आपदी SOL ID	चेक नं. CHQ. No.	निकाली गयी राशि DEBIT	जमा की गयी राशि CREDIT	जमाकर्ता के खाते में शेष राशि BALANCE	लेखाकार आरम्भ INITIAL
----------------	----------------------	--------------------------	------------------------	-----------------------------	------------------------------	---	--------------------------

18/11/2025

18-11-2024 To 18-11-2024

50000

67500

20000.00

20000.00 Cr

यूनियन बैंक
ऑफ इंडिया
Union Bank
of India

एकता सर्वत्र भवतु A Government of India Undertaking



शाखा / Branch :

PALISSERY

Issue date: 23-03-2023

शाखा का पता / Branch Address :

SCMS COLLEGE OF ENGG AND TECH
VIDHYA NAGAR, PALISSERY PALISSERY-683582

Sr No: 1

शाखा का फोन नं. / Branch Phone No.:

KERALA

INDIA

खाता क्र. / Account No.:

IFSC Code : UBIN0558885

In the Name of :

588802010008182

नाम / Name

(SB GENERAL)

i)
ii)
iii)

M/S CEND RESEARCH SEED MONEY KTU RESEARCH 3 1082 2022

पेशा / Occupation

पता / Address

खाता खोलने की तारीख

SCMS SCHOOL OF ENGG AND TECH

VIDHYA NAGAR PALISSERY

Date of Opening A/c

10-03-2023

KARUKUTTY

Pin : 683576 KERALA

INDIA

नामांकन पंजीकृत / Nomination Registered: हाँ Y / नहीं N

लेखाकार Accountant

Please read the latest facilities of Nomination in your accounts including locker, to avoid inconvenience to your legal heirs in settlement of claims after you. Nomination can be changed, modified, cancelled by you any time during your lifetime.

नवीनतम संशोधन / Latest Amendments 1. निष्क्रिय खाते के संबंध में / About Dormant Accounts

- लगातार 12 माह तक परिचालित न हुए बचत खाते को निष्क्रिय खाते रूप में वर्गीकृत कर दिया जायेगा. निष्क्रिय खाते में परिचालन की अनुमति नहीं होगी. खाते को सक्रिय कराने के लिये ग्राहक कृपया शाखा प्रबंधक से संपर्क करे तथा निष्क्रिय खाते को पुनः सक्रिय कराये बिना उस पर कोई चेक जारी न करें.
 - Saving Banks Accounts, which are inoperative for a continuous period of 12 months will be classified as Dormant. Operations will not be allowed in Dormant Account. Customers are requested to contact the Branch Manager for re-activating the account and are requested not to issue any cheques on Dormant Account before they are reactivated.
- ## 2. चेक पर परिवर्तन / अधिलेखन के संबंध में / About Alterations / Overwritings on cheques
- चेक पर कोई परिवर्तन / संशोधन न किया जाए. आदाता के नाम, रकम (पुनः वैधीकरण की दृष्टि से दिनांक में परिवर्तन को छोड़कर) आदि में परिवर्तन के लिये नया चेक प्रयोग करें.
 - No changes/corrections should be carried out on the cheques. For any change in the payee's name, the amount (other than date for validation purpose) etc, fresh cheque forms should be used.

यूनियन बैंक  Union Bank
of India



शाखा / Branch :

PALISSERY

Issue date: 23-03-2023

शाखा का पता / Branch Address :

SCMS COLLEGE OF ENGG AND TECH

Sr No: 1

शाखा का फोन नं. / Branch Phone No.:

VIDHYA NAGAR, PALISSERY PALISSERY-683582

KERALA

INDIA

खाता क्र. / Account No.:

IFSC Code : UBIN0558885

In the Name of :

नाम / Name i)

588802010008178

ii)

(SB GENERAL)

iii)

M/S CERD RESEARCH SEED MONEY KTU RESEARCH 3 1082 2022

पेशा / Occupation

पता / Address

खाता खोलने की तारीख

SCMS SCHOOL OF ENGG AND TECH

VIDHYA NAGAR PALISSERY

Date of Opening A/c

KARUKUTTY

Pin : 683576 KERALA

INDIA

10-03-2023

नामांकन पंजीकृत / Nomination Registered: हाँ Y / नहीं N

लेखाकार Accountant

दिनांक Date	विवरण Particulars	सोल आयडी SOL ID	चेक नं. CHQ. No.	निकाली गयी राशि DEBIT	जमा की गयी राशि CREDIT	जमाकर्ता के खाते में शेष राशि BALANCE	लेखाकर्ता का हस्ताक्षर INITIAL
----------------	----------------------	--------------------------	------------------------	-----------------------------	------------------------------	---	-----------------------------------

18-11-2023 By NEFT:Director of Treasuries accou 47380
07-01-2024 By 588802010008178:Int.Pd:01-10-2023 58880

57500.00
191.00

57500.00 Cr
57691.00 Cr

UNION BANK OF INDIA
PALISSERY
SCMS COLLEGE OF ENGG AND TECH
VIDHYA NAGAR, PALISSERY
PHONE: 04842419029

TO:

M/S CERD RESEARCH SEED MONEY RTU RESEARCH 3 10H2 2022 10
SCMS SCHOOL OF ENGG AND TECH
VIDHYANAGAR PALISSERY
KARUKUTTY-683576
KERALA, INDIA
Village : 627965 -Karukutty

DATE: 12-01-2024

CUST ID : 961093778

EMAIL ID:CATHIE6068@GMAIL.COM

STATEMENT OF ACCOUNT FOR THE PERIOD FROM 01-04-2023 to 11-01-2024 SBGEN-A/C NO: 588802010008190 SB GENERAL 1SB GENERAL:INP

DATE	PARTICULARS	CHQ. NO.	WITHDRAWALS	DEPOSITS	BALANCE
					0.00
11-10-2023	MUMBAI, SERVICE BRANCH, MUMBAI NEFT: Director of Treasuries account for UTR Number Sender Account Sender IFSC Sender Bank Sender Branch	RBI285232		40,000.00	40,000.00
		RBI2852329103748			
		01585701041			
		RB1S0GOKLEP			
		RESERVE BANK OF INDIA			
		THIRUVANANTHAPURAM			
Cumulative Totals:			0	40,000.00	40,000.00

The Min. Bal. Requirement in (Urban Br.) For SB Account is Rs 500 (without Cheque book) and Rs 1000/- (with Cheque book).

Unless constituent notifies the bank immediately of any discrepancy found by him in his statement of Account, it will be taken that he has found the account correct.

To strengthen your Aadhaar, update your Aadhaar if 10 years old

FASTEST MODE OF FUNDS REMITTANCE-RTGS (UNION BULLET).
IFSC/MICR code for PALISSERY is UBIN0558885/683026004

Contact all India toll Free no. 1800 22 22 44 for your account related queries / services
Please visit your branch to avail facility of Nomination in your accounts including locker, to avoid inconvenience to your legal heirs in settlement of claims after you. Nomination can be changed, modified, cancelled by you any time during your lifetime

Manager

 कृत यूनिवर्सल बैंक ऑफ इंडिया
FOR UNION BANK OF INDIA



लेखा / Accountant

पालिशेरी शाखा / Palissery Branch

IFSC/MICR code for PALISSERY is UBIN05588
58880, powappsrv15, BV584038

PAGE: 1

Phone No 04842439029

Customer

नाम 901093858 M/S CERD RSM KTU RES
Name

खाता क्र.
A/c. no.
588802010008181 (SB GENERAL)

Cust id : 901093858

Village : 627965 -Karukutty

MICR Code : 683076004

IFSC Code : UBIN0558885

बचत बैंक खाता
पास बुक

SAVINGS BANK
PASS BOOK

नामंकन सुविधा उपलब्ध
Nomination facility available

www.unionbankonline.co.in/

Missed Call Balance Mob No:09223008586

यूनियन बैंक
अफ इंडिया



Union Bank
of India

A Government of India Undertaking



आन्ध्र
Andhra



आन्ध्र प्रदेश
Corporation

दिनांक Date	विवरण Particulars	सोल आयडी SOL ID	चेक नं. CHQ. No.	निकाली गयी राशि DEBIT	जमा की गयी राशि CREDIT	जमाकर्ता के खाते में शेष राशि BALANCE	लेखाकर आक्षेप INITIAL
----------------	----------------------	--------------------------	------------------------	-----------------------------	------------------------------	---	--------------------------

18-11-2023 By NEFT:Director of Treasuries accou 47380

50000.00

50000.00 Cr